



Imported from Italy, RE-EVOLUTION porcelain slabs have a concrete trowel look with a high honed smooth finish.

**PRODUCT TYPE:** 3.5mm fibreglass reinforced lightweight

porcelain

COLOURS: Latte, Concrete, Grey and Charcoal

SIZES: 500x1000x3.5mm, 1000x1000x3.5mm and

1000x3000x3.5mm Rectified edges

FINISHES/USAGE: Satin/Wall and floor

**AESTHETIC QUALITIES:** Porcelain slabs

COUNTRY OF ORIGIN: Italy

**TECHNICAL DATA:** More technical data on the last page.

VARIATION:



V2





### PRODUCT SPECIFICATIONS

SIZES	FINISHES	TILE EDGE
500X1000x3.5mm*	SATIN	RECTIFIED
500X1000X3.5mm	SAIIN	RECTIFIED
1000X1000x3.5mm*	SATIN	RECTIFIED
1000X3000x3.5mm*	SATIN	RECTIFIED

<sup>\*</sup> Indent item - Subject to stock availability overseas, please allow 10-12 weeks lead time from date of order confirmation. Minimum quantity may apply.

### **FORMATS**



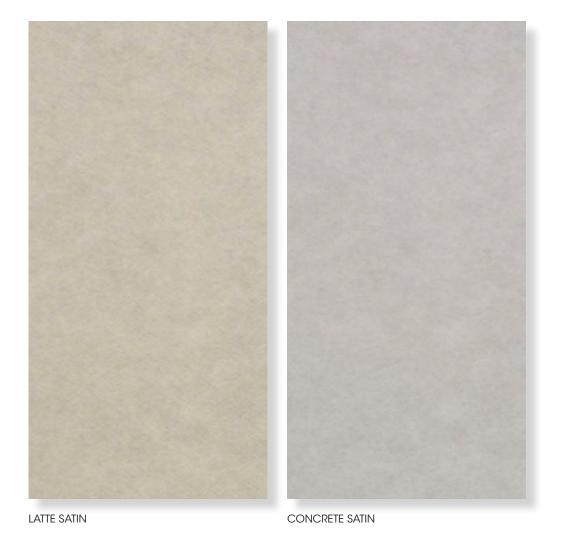

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.




### PRODUCT SPECIFICATIONS

SIZES	FINISHES	TILE EDGE
500X1000x3.5mm*	SATIN	RECTIFIED
1000X1000x3.5mm*	SATIN	RECTIFIED
1000X3000x3.5mm*	SATIN	RECTIFIED

<sup>\*</sup> Indent item - Subject to stock availability overseas, please allow 10-12 weeks lead time from date of order confirmation. Minimum quantity may apply.

### **FORMATS**








GREY SATIN CHARCOAL SATIN



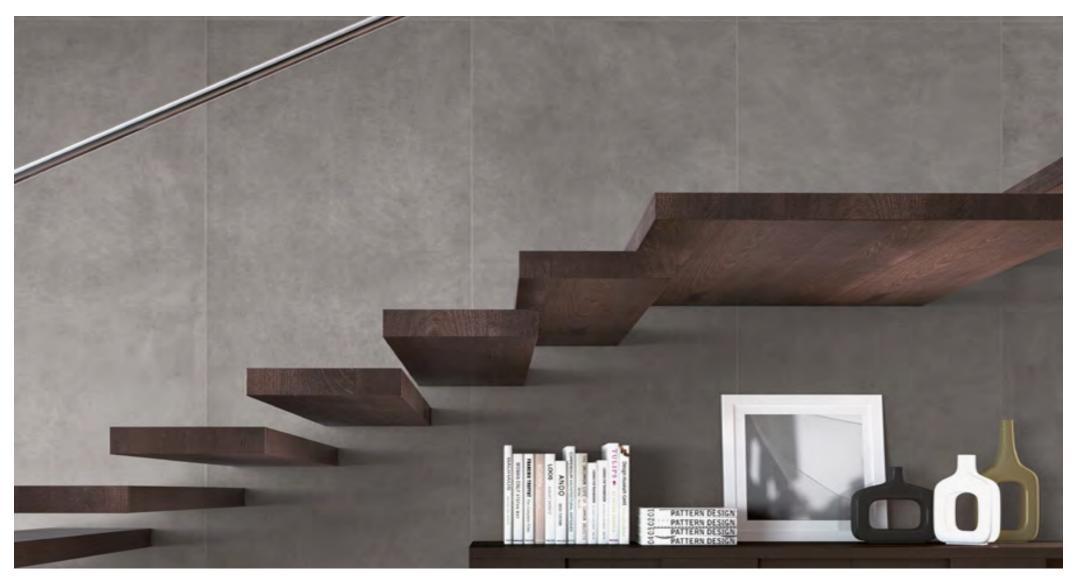







#### LARGE FORMAT | STRENGTH | DURABILITY | EASY MAINTENANCE | LIGHT WEIGHT | RENOVATIONS MADE EASY

Laminated porcelain stoneware with a fiberglass backing allows for tension to be spread evenly, thus making this extremely strong for a thin porcelain slab.

Large formats (up to 1000x3000mm) allow for fewer grout joints, which offers the visual advantage of making spaces look larger.

Lightweight format means Slimtech's application is versatile: splash backs, walls, bench tops, joinery and facades.

Latest technology in porcelain stoneware creates a surface flatness second to none.

Slabs are only 3.5mm thick making them easy to cut, drill and install.

Easy to renovate over existing wall and floors tiles (surface/substrate must be flat) saving on demolition and labour costs.

Resistant to stains and chemical agents making it easy to clean and maintain. No sealing required.

Slimtech is eco friendly - uses less materials, environmentally friendly kilns and there is more square metres per shipment .

3.5mm thickness is 8.5kgs per square metre.

POLISHED FINISH SUITABLE FOR WALL COVERINGS AND FLOORS IN RESIDENTIAL APPLICATIONS. SATIN FINISH SUITABLE FOR WALL COVERINGS AND FLOORS IN BOTH RESIDENTIAL AND LIGHT COMMERCIAL APPLICATIONS.

For more technical information about installation, cleaning and care, please download the SLIMTECH MANUAL PDF on our website.



### TECHNICAL DATA

## **Re-Evolution**

#### laminated porcelain UGL

	technical characteristics	test method	required values iso 13006 - G / en 14411 - G BIa ugl	value
۵ ۵ ۵ ۵ ۵	water absorption	iso 10545-3	≤ 0,5%	≤ 0,01%*
7	frost resistance	iso 10545-12	no alterations	resistant
60	bending strength	iso 10545-4	≥ 35 N/mm²	≥ 120 N/mm <sup>2**</sup>
60	breaking strength (S)	iso 10545-4	≥ 700 N	≥ 1000 N**
<b>©</b>	resistace to deep abrasion	iso 10545-6	≤ 175 mm³	compliant
L	resistance to compression	-	-	≥ 400 N/mm²
<u>+</u>	thermal shock resistance	iso 10545-9	resistant	resistant
P	chemical resistance	iso 10545-13	as indicated by manifacturer	resistant
<b>`</b> ``	stain resistance	iso 10545-14	≥ class 3	resistant