

Slimtech Timeless



PRODUCT TYPE: 5.5mm fibreglass reinforced lightweight porcelain slabs

COLOURS: Calacatta, Pietra Gray, Statuario White and Calacatta Bookmatch

SIZES: 1000x1000mm and 1000x3000mm
Rectified Edges


FINISHES/USAGE: Satin (Wall and floor) and Polished (Polished wall only)

AESTHETIC QUALITIES: Porcelain slabs

COUNTRY OF ORIGIN: Italy

TECHNICAL DATA: More technical data on the last page.

VARIATION:



V3


With the timeless quality of marble and the strength of ceramic, this revolutionary design offers large format tiles with the precious look of real marble.

Slimtech Timeless

PRODUCT SPECIFICATIONS

SIZES	FINISHES	TILE EDGE
1000x1000x5.5mm*	SATIN	RECTIFIED
1000x3000x5.5mm	SATIN	RECTIFIED
1000x1000x5.5mm*	POLISHED	RECTIFIED
1000x3000x5.5mm	POLISHED	RECTIFIED

* Indent item - Subject to stock availability overseas, please allow 10-12 weeks lead time from date of order confirmation. Minimum quantity may apply.



CALACATTA SATIN


CALACATTA POLISH

Slimtech Timeless

PRODUCT SPECIFICATIONS

SIZES	FINISHES	TILE EDGE
1000x1000x5.5mm*	SATIN	RECTIFIED
1000x3000x5.5mm*	SATIN	RECTIFIED
1000x1000x5.5mm*	POLISHED	RECTIFIED
1000x3000x5.5mm*	POLISHED	RECTIFIED

* Indent item - Subject to stock availability overseas, please allow 10-12 weeks lead time from date of order confirmation. Minimum quantity may apply.



PIETRA GREY SATIN





PIETRA GREY POLISH

Slimtech Timeless


PRODUCT SPECIFICATIONS

SIZES	FINISHES	TILE EDGE
1000x1000x5.5mm*	SATIN	RECTIFIED
1000x3000x5.5mm*	SATIN	RECTIFIED
1000x1000x5.5mm*	POLISHED	RECTIFIED
1000x3000x5.5mm*	POLISHED	RECTIFIED

* Indent item - Subject to stock availability overseas, please allow 10-12 weeks lead time from date of order confirmation. Minimum quantity may apply.

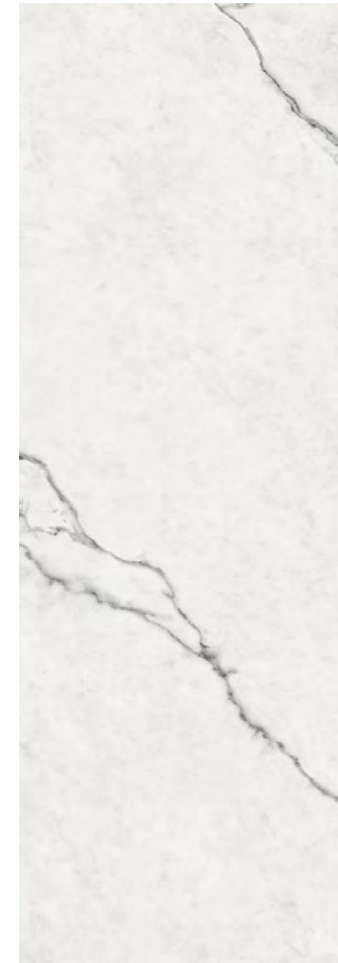

STATUARIO SATIN

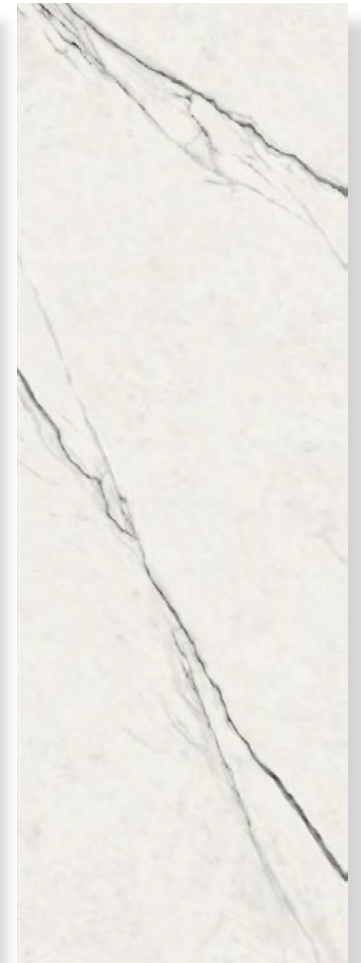


STATUARIO POLISH

Slimtech Timeless

PRODUCT SPECIFICATIONS

SIZES	FINISHES	TILE EDGE
1000x3000x5.5mm*	POLISHED	RECTIFIED

* Indent item - Subject to stock availability overseas, please allow 10-12 weeks lead time from date of order confirmation. Minimum quantity may apply.



CALACATTA BOOKMATCH SIDE A CALACATTA BOOKMATCH SIDE B

Slimtech Timeless

CALACATTA VARIATION



STATUARIO VARIATION



PIETRA GREY VARIATION



Slimtech Timeless



Slimtech Timeless



Slimtech Timeless

LARGE FORMAT | STRENGTH | DURABILITY | EASY MAINTENANCE | LIGHT WEIGHT | RENOVATIONS MADE EASY

Laminated porcelain stoneware with a fiberglass backing allows for tension to be spread evenly, thus making this extremely strong for a thin porcelain slab.

Large formats (up to 1000x3000mm) allow for fewer grout joints, which offers the visual advantage of making spaces look larger.

Lightweight format means Slimtech's application is versatile: splash backs, walls, bench tops, joinery and facades.

Latest technology in porcelain stoneware creates a surface flatness second to none.

Slabs are only 5.5mm thick making them easy to cut, drill and install.

Easy to renovate over existing wall and floors tiles (surface/substrate must be flat) saving on demolition and labour costs.

Resistant to stains and chemical agents making it easy to clean and maintain. No sealing required.

Slimtech is eco friendly - uses less materials, environmentally friendly kilns and there is more square metres per shipment .

5.5mm thickness is 11.5kgs per square metre.










POLISHED FINISH SUITABLE FOR WALL COVERINGS AND FLOORS IN RESIDENTIAL APPLICATIONS. SATIN FINISH SUITABLE FOR WALL COVERINGS AND FLOORS IN BOTH RESIDENTIAL AND LIGHT COMMERCIAL APPLICATIONS.

For more technical information about installation, cleaning and care, please download the SLIMTECH MANUAL PDF on our website.

TECHNICAL DATA

Slimtech Timeless

laminated porcelain UGL

	technical characteristics	test method	required values iso 13006 - G / en 14411 - G B1a ugl	value
	water absorption	iso 10545-3	≤ 0,5%	≤ 0,01%*
	frost resistance	iso 10545-12	no alterations	resistant
	bending strength	iso 10545-4	≥ 35 N/mm ²	≥ 120 N/mm ^{2**}
	breaking strength (S)	iso 10545-4	≥ 700 N	≥ 1000 N**
	resistance to deep abrasion	iso 10545-6	≤ 175 mm ³	compliant
	resistance to compression	-	-	≥ 400 N/mm ²
	thermal shock resistance	iso 10545-9	resistant	resistant
	chemical resistance	iso 10545-13	as indicated by manufacturer	resistant
	stain resistance	iso 10545-14	≥ class 3	resistant