

Toronto



PRODUCT TYPE: Glazed Porcelain

COLOURS: Pearl, Ash and Slate

SIZES: 300x300mm, 300x600mm, 600x600mm


FINISHES/USAGE: Rectified edges

AESTHETIC QUALITIES: Matt, Semi-Polished, Satin & Grip/Wall & floor

The digital system guarantees realistic, authentic colouring, with variations in texture and patterning.

TECHNICAL DATA: P3 Pendulum slip rating (Matt)
P2 Pendulum slip rating (Satin)
P5 Pendulum slip rating (Grip)
More technical data on the last page

VARIATION:



V3


TORONTO is produced using hi-definition inkjet technology to recreate a crosscut stone look.

Toronto

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
300x300mm	MATT	P3 Pendulum	RECTIFIED
300x600mm	MATT	P3 Pendulum	RECTIFIED
600x600mm	MATT	P3 Pendulum	RECTIFIED
300x600mm	SEMI POLISHED	–	RECTIFIED
300x600mm	SEMI POLISHED	–	RECTIFIED

FORMATS



PEARL MATT



PEARL MATT



Toronto

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
300x300mm	MATT	P3 Pendulum	RECTIFIED
300x600mm	MATT	P3 Pendulum	RECTIFIED
600x600mm	MATT	P3 Pendulum	RECTIFIED
300x600mm	SEMI POLISHED	–	RECTIFIED
300x600mm	SEMI POLISHED	–	RECTIFIED
300x600mm	GRIP	P5 Pendulum	RECTIFIED
600x600mm	GRIP	P5 Pendulum	RECTIFIED



ASH MATT




ASH SEMI-POLISHED



ASH GRIP

FORMATS



Toronto

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
300x300mm	SATIN	P2 Pendulum	RECTIFIED
300x600mm	SATIN	P2 Pendulum	RECTIFIED
600x600mm	SATIN	P2 Pendulum	RECTIFIED
300x600mm	GRIP	P5 Pendulum	RECTIFIED
600x600mm	GRIP	P5 Pendulum	RECTIFIED



SLATE SATIN




SLATE GRIP


FORMATS



300x600mm



300x300mm




600x600mm







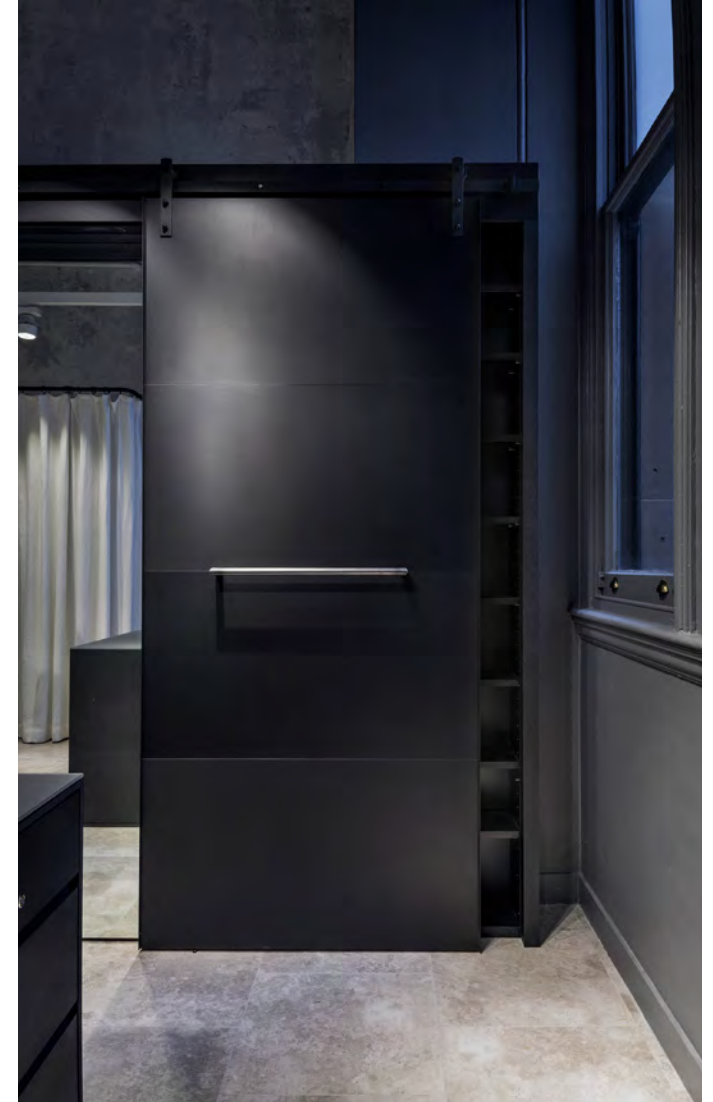

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

Toronto



TECHNICAL DATA

	technical characteristics	test method	required values	value
	Group B I a			
	water absorption	iso 10545-30	≤ 0.5%	.21%
	bending strength	iso 10545-4	≥ 12MPA	≥ 33.5MPA
	breaking strength (S)	iso 10545-4	≥ 350 N	≥ 1785N
	abrasion resistance	iso 10545-7	Max. 175 mm ³ PEI 1-5	Class3
	chemical resistance	iso 10545-13	Household chemicals and swimming pool salts	GA
			Low concentration of acids and alkalis	GLA
	stain resistance	iso 10545-14	Minimum Class 3	Class 5