

Vancouver



PRODUCT TYPE: Glazed Porcelain

COLOURS: Pale Grey, Mid Grey and Dark Grey


SIZES: 300x300mm, 300x600mm, 280x300mm
Rectified edges

FINISHES/USAGE: Matt, Semi Polish & Grip/Wall & floor

AESTHETIC QUALITIES: The digital system guarantees realistic, authentic colouring, with variations in texture and patterning. The colour varies in tone, light and shade.

TECHNICAL DATA: P4 Pendulum slip rating (Matt)
P5 Pendulum slip rating (Grip)
P4 AWT 500 cycles (Grip)

VARIATION:



V2


VANCOUVER is produced using hi-definition inkjet technology to recreate a lineal stone look. With matt and textured finishes to choose from, VANCOUVER has the appearance of natural stone.

Vancouver

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
300x300mm	MATT	P4 Pendulum	RECTIFIED
300x600mm	MATT	P4 Pendulum	RECTIFIED
280x300mm	TRIANGLE MATT	P4 Pendulum	RECTIFIED
300x600mm	GRIP	P5 Pendulum	RECTIFIED
300x600mm	SEMI POLISH	-	RECTIFIED

FORMATS



PALE GREY MATT



MID GREY MATT



DARK GREY MATT



PALE GREY GRIP



MID GREY GRIP



DARK GREY GRIP



PALE GREY SEMI POLISH



MID GREY SEMI POLISH




DARK GREY SEMI POLISH

Vancouver

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
300x300mm	MATT	P4 Pendulum	RECTIFIED
300x600mm	MATT	P4 Pendulum	RECTIFIED
280x300mm	TRIANGLE MATT	P4 Pendulum	RECTIFIED
300x600mm	GRIP	P5 Pendulum	RECTIFIED
300x600mm	SEMI POLISH	-	RECTIFIED

FORMATS

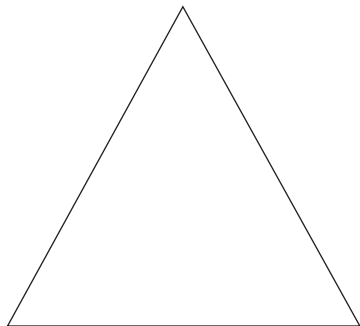

280x300mm



PALE GREY MATT



MID GREY MATT









DARK GREY MATT

Vancouver



Vancouver

TECHNICAL DATA

	technical characteristics	test method	required values	value
	Group B I a			
	water absorption	iso 10545-3	≤ 0,5%	0.21%
	bending strength	iso 10545-4	≥ 12MPA	≥ 33.5MPA
	breaking strength (S)	iso 10545-4	≥ 350 N	≥ 1785N
	abrasion resistance	iso 10545-7	Max. 175 mm ³ PEI 1-5	Class 3
	chemical resistance	iso 10545-13	Household chemicals and swimming pool salts	GA
			Low concentration of acids and alkalis	GLA
	stain resistance	iso 10545-14	Minimum Class 3	Class 5