

Venato



PRODUCT TYPE: Glazed Porcelain

COLOURS: White, Soft Grey, Grey and Basalt


SIZES: 300x300mm, 300x600mm and
600x600mm
Rectified edges

FINISHES/USAGE: Matt and Grip
Floor and wall

AESTHETIC QUALITIES: Terrazzo look

TECHINICAL INFO: P3 Pendulum Slip Rating (Matt)
P5 Pendulum Slip Rating (Grip)
P4 AWT (After 500 cycles) (Grip)
More technical info on the last page

VARIATION:



V1



The terrazzo look without the associated maintenance. These porcelain tiles are available in the modular sizing with four contemporary colourways suitable for all environments through the matt, grip and semi-polished finishes.

Venato

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
300x300mm	MATT	P3 Pendulum	RECTIFIED
300x600mm	MATT	P3 Pendulum	RECTIFIED
600x600mm	MATT	P3 Pendulum	RECTIFIED
300x600mm	GRIP	P5 Pendulum	RECTIFIED

FORMATS



WHITE MATT



SOFT GREY MATT





SOFT GREY MATT

Venato

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
300x300mm	MATT	P3 Pendulum	RECTIFIED
300x600mm	MATT	P3 Pendulum	RECTIFIED
600x600mm	MATT	P3 Pendulum	RECTIFIED
300x600mm	GRIP	P5 Pendulum	RECTIFIED


FORMATS




GREY MATT



GREY GRIP

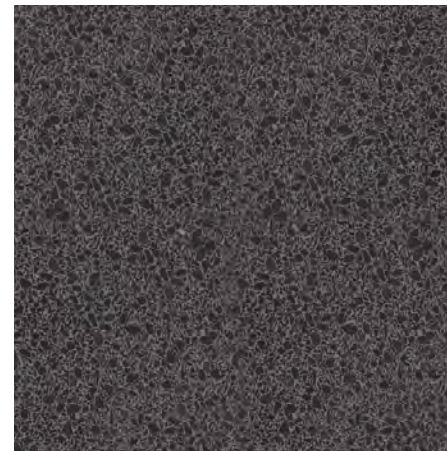

BASALT MATT

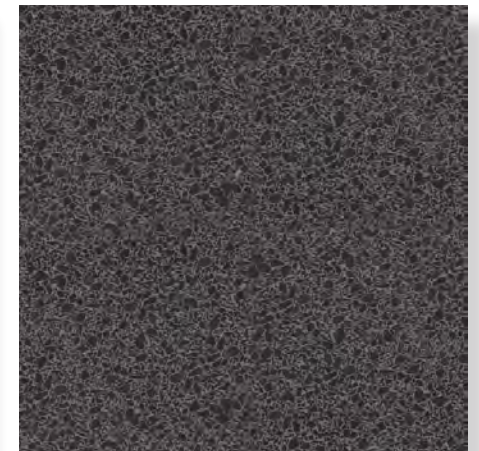

BASALT GRIP







Venato



Venato



TECHNICAL DATA

	technical characteristics Group B I a	test method	required values	value
	water absorption	iso 10545-3	≤ 0.5%	0.21%
	bending strength	iso 10545-4	≥ 12MPA	≥ 33.5MPA
	breaking strength (S)	iso 10545-4	≥ 350 N	≥ 1785N
	abrasion resistance	iso 10545-7	Max. 175 mm ³ PEI 1-5	Class 3
	chemical resistance	iso 10545-13	Household chemicals and swimming pool salts	GA
			Low concentration of acids and alkalis	GLA
	stain resistance	iso 10545-14	Minimum Class 3	Class 5