




Made in Italy, ZOKU MAX is the latest series to offer a metallic surface finish in large format slabs. Available in four colours and three versatile sizes, ZOKU MAX can be used as a decorative solution for floors and walls in commercial and residential spaces, including the exterior facades of buildings.

PRODUCT TYPE:	Porcelain Slab		
COLOURS:	Pale Silver, Silver, Corten and Iron		
SIZES:	1200x1200x7mm,1200x2400x7mm and 1600x3200x6mm Rectified edges		
FINISHES/USAGE:	Natural/Wall and Floor		
ESTHETIC QUALITIES:	Metal look slabs		
TECHNICAL DATA:	More information on last page		
ORIGIN:	Italy		
VARIATION:	V2		



TECHNICAL QUALITIES

Slim porcelain slabs allowing endless custom design opportunities such as joinery cladding, internal and external facades.

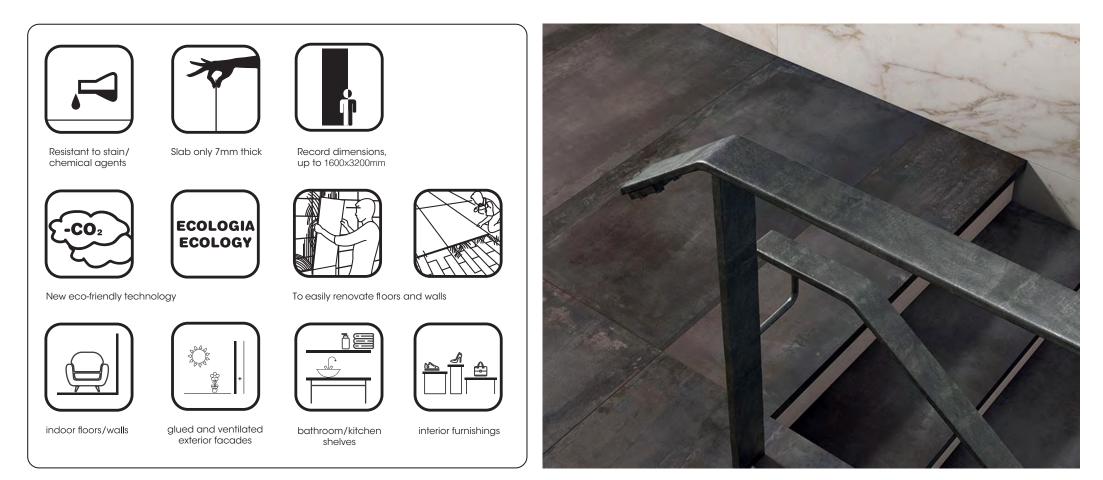

skheme®


Zoku Max

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
1200x1200mm*	NATURAL	-	RECTIFIED
1200x2400mm	NATURAL	-	RECTIFIED
1600x3200mm*	NATURAL	-	RECTIFIED

*Indent item - Subject to stock availability overseas, please allow 10-12 weeks lead time from date of order confirmation. Minimum quantity may apply.

FORMATS

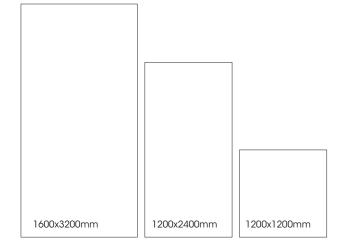



PALE SILVER NATURAL

IRON NATURAL

skheme®


Zoku Max

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
1200x1200mm*	NATURAL	-	RECTIFIED
1200x2400mm*	NATURAL	-	RECTIFIED
1600x3200mm*	NATURAL	-	RECTIFIED

*Indent item - Subject to stock availability overseas, please allow 10-12 weeks lead time from date of order confirmation. Minimum quantity may apply.

FORMATS

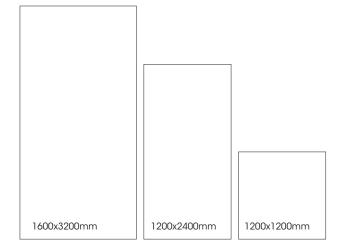



SILVER NATURAL


CORTEN NATURAL





Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.



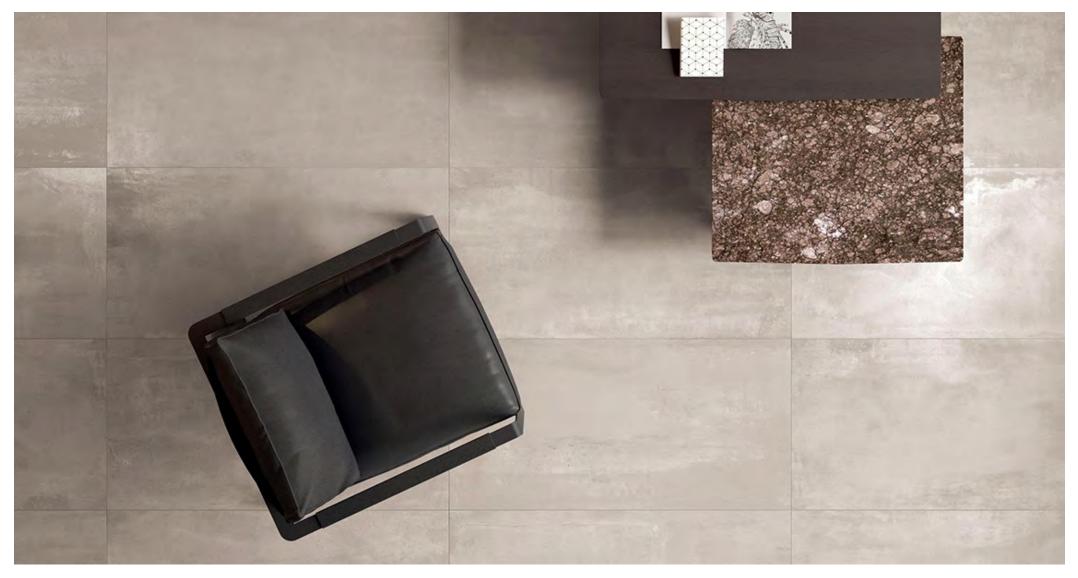



TECHNICAL DATA

Technical Characteristis	Test Standard	Product Standard	Result	
Length and Width	ISO 10545-2+	/-0,6% (+/-2mm)	Complies	
Thickness	ISO 10545-2	+/-0,5% (+/-5mm)	Complies	
Straightness of sides	ISO 10545-2	+/-0,5% (+/-1,5mm)	Complies	
Rectangularity	ISO 10545-2	+/-0,5% (+/-2mm)	Complies	
Water Absorption	ISO 10545-3	Eb 0,5%	Eb 0,3%	
Breaking Strength	ISO 10545-4	min 1300	>1500	
Modulus of Rupture	ISO 10545-4	min 35	45	
Warp	ISO 10545-2	Deviation % Max	Complies	
Thermal Shock	ISO 10545-9	Test method available	Resistant	
Frost Resistance	ISO 10545-12	Required	Resistant	
Resistance to household chemicals	ISO 10545-13	min GB	min GA	