



The original and most realistic Basalt look porcelain tile influenced by natural lava stone.

PRODUCT TYPE: Colour-bodied porcelain

COLOURS: Brown, Sabbiata, Lappata and Stuccata

SIZES: 300x600mm, 600x600mm, 600x1200mm

FINISHES/USAGE: Semi-Polish, Matt and Grip/Wall + Floor

TECHINICAL INFO: P5 Pendulum (Grip)

P2 Pendulum (Matt)

The GRIP finish in all sizes receives a Sustainable Slip Resistance value of AWT P4 Pendulum after 500 cycles

ORIGIN: Italy

VARIATION:





PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATINGS	TILE EDGE
300x600mm*	GRIP	P5 Pendulum	RECTIFIED
600x600mm*	GRIP	P5 Pendulum	RECTIFIED
600x1200mm*	GRIP	P5 Pendulum	RECTIFIED

*Indent item - Subject to stock availability overseas, please allow 10-12 weeks lead time from date of order confirmation. Minimum quantity may apply.

The GRIP finish in all sizes receives a Sustainable Slip Resistance value of P4 Pendulum after 500 cycles



300x600mm

600x600mm

600x1200mm



SABBIATA GRIP



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.



PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATINGS	TILE EDGE
75x300mm	GRIP	P5 Pendulum	RECTIFIED
600x600mm	GRIP	P5 Pendulum	RECTIFIED
600x600mm*	MATT	P2 Pendulum	RECTIFIED
600x1200mm*	MATT	P2 Pendulum	RECTIFIED

*Indent item - Subject to stock availability overseas, please allow 10-12 weeks lead time from date of order confirmation. Minimum quantity may apply.

The GRIP finish in all sizes receives a Sustainable Slip Resistance value of P4 Pendulum after 500 cycles

FORMATS

75x3000mm
600x600mm









STUCCATA GRIP



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.




PRODUCT SPECIFICATIONS


SIZES	FINISHES	TILE EDGE
300x600mm*	SEMI-POLISHED	RECTIFIED
600x600mm*	SEMI-POLISHED	RECTIFIED
600x1200mm*	SEMI-POLISHED	RECTIFIED

*Indent item - Subject to stock availability overseas, please allow 10-12 weeks lead time from date of order confirmation. Minimum quantity may apply.



LAPPATA SEMI-POLISHED



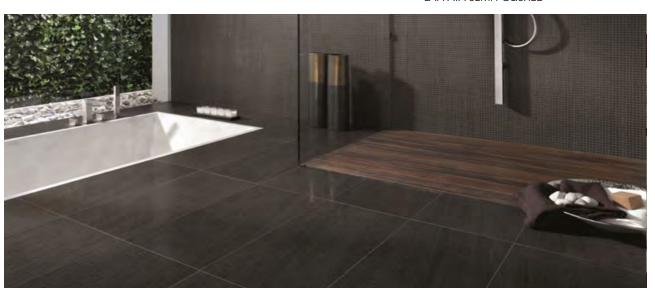











TECHNICAL DATA

	technical characteristics	required values	value
888	water absorption	0.5%	0.3%
	frost resistance	no alterations	resistant
B C	bending strength	35N/mm²	38N/mm²
	resistace to deep abrasion	>175 mmኞ	145 mm
± [thermal shock resistance	resistant	resistant
	chemical resistance	resistant	resistant