

Prima



PRODUCT TYPE: Coloured-bodied porcelain

COLOURS: Cenere, Cemento and Sandalo

SIZES: 200x1200mm, 600x1200mm, 400x800mm,
800x800mm, 800x1800mm and
400x1200x20mm paver
Rectified edges


FINISHES/USAGE: Natural/Wall and Floor
Cerato/ Wall and Floor
Grip/Floor Only
Feature/Wall only

TECHNICAL INFO: P3 Pendulum Slip Rating (Natural)
P4 Pendulum Slip Rating (Grip)

AESTHETIC QUALITIES: Concrete look with matching feature tiles

ORIGIN: Italy

VARIATION:



V2

Made in Italy, PRIMA is the matching tile series to PRIMA MAX slabs. PRIMA displays a contemporary concrete surface with subtle movement and variation. Available in three colours and five versatile finishes.

Prima

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
200x1200mm*	NATURAL	P3 Pendulum	RECTIFIED
600x1200mm*	NATURAL	P3 Pendulum	RECTIFIED
400x800mm*	NATURAL	P3 Pendulum	RECTIFIED
800x800mm*	NATURAL	P3 Pendulum	RECTIFIED
800x1800mm*	NATURAL	P3 Pendulum	RECTIFIED
200x1200mm*	CERATO	-	RECTIFIED
600x1200mm*	CERATO	-	RECTIFIED
400x800mm*	CERATO	-	RECTIFIED
800x800mm*	CERATO	-	RECTIFIED
800x1800mm*	CERATO	-	RECTIFIED
200x1200mm*	GRIP	P4 Pendulum	RECTIFIED
600x1200mm*	GRIP	P4 Pendulum	RECTIFIED
400x800mm*	GRIP	P4 Pendulum	RECTIFIED
400x1200x20mm*	GRIP PAVER	P4 Pendulum	RECTIFIED
600x1200mm*	LISCA	-	RECTIFIED
600x1200mm*	ESAGONO	-	RECTIFIED

*Indent item - Subject to stock availability overseas, please allow 10-12 weeks lead time from date of order confirmation. Minimum quantity may apply.



CENERE NATURAL



CENERE LISCA



CENERE ESAGONO

* ALSO AVAILABLE IN CERATO AND GRIP

Prima

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
200x1200mm*	NATURAL	P3 Pendulum	RECTIFIED
600x1200mm*	NATURAL	P3 Pendulum	RECTIFIED
400x800mm*	NATURAL	P3 Pendulum	RECTIFIED
800x800mm*	NATURAL	P3 Pendulum	RECTIFIED
800x1800mm*	NATURAL	P3 Pendulum	RECTIFIED
200x1200mm*	CERATO	-	RECTIFIED
600x1200mm	CERATO	-	RECTIFIED
400x800mm*	CERATO	-	RECTIFIED
800x800mm*	CERATO	-	RECTIFIED
800x1800mm*	CERATO	-	RECTIFIED
200x1200mm*	GRIP	P4 Pendulum	RECTIFIED
600x1200mm	GRIP	P4 Pendulum	RECTIFIED
400x800mm*	GRIP	P4 Pendulum	RECTIFIED
400x1200x20mm*	GRIP PAVER	P4 Pendulum	RECTIFIED
600x1200mm*	LISCA	-	RECTIFIED
600x1200mm*	ESAGONO	-	RECTIFIED

*Indent item - Subject to stock availability overseas, please allow 10-12 weeks lead time from date of order confirmation. Minimum quantity may apply.



CEMENTO NATURAL



CEMENTO LISCA



CEMENTO ESAGONO

* ALSO AVAILABLE IN CERATO AND GRIP

Prima

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
200x1200mm*	NATURAL	P3 Pendulum	RECTIFIED
600x1200mm*	NATURAL	P3 Pendulum	RECTIFIED
400x800mm*	NATURAL	P3 Pendulum	RECTIFIED
800x800mm*	NATURAL	P3 Pendulum	RECTIFIED
800x1800mm*	NATURAL	P3 Pendulum	RECTIFIED
200x1200mm*	CERATO	-	RECTIFIED
600x1200mm*	CERATO	-	RECTIFIED
400x800mm*	CERATO	-	RECTIFIED
800x800mm*	CERATO	-	RECTIFIED
800x1800mm*	CERATO	-	RECTIFIED
200x1200mm*	GRIP	P4 Pendulum	RECTIFIED
600x1200mm*	GRIP	P4 Pendulum	RECTIFIED
400x800mm*	GRIP	P4 Pendulum	RECTIFIED
400x1200x20mm*	GRIP PAVER	P4 Pendulum	RECTIFIED
600x1200mm*	LISCA	-	RECTIFIED
600x1200mm*	ESAGONO	-	RECTIFIED

*Indent item - Subject to stock availability overseas, please allow 10-12 weeks lead time from date of order confirmation. Minimum quantity may apply.



SANDALO NATURAL



SANDALO LISCA






SANDALO ESAGONO

* ALSO AVAILABLE IN CERATO AND GRIP

Prima

FORMATS

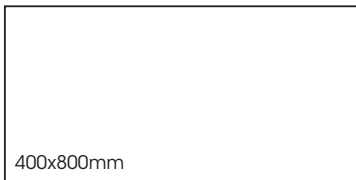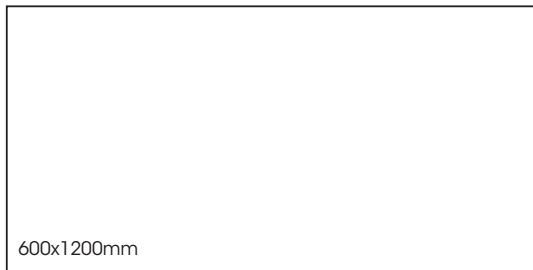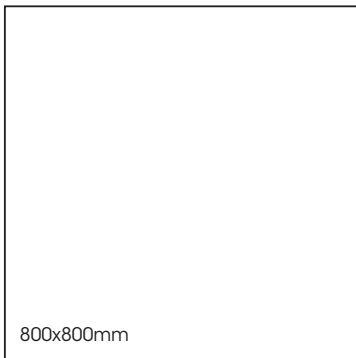









Prima



Prima



TECHNICAL DATA

	technical characteristics	test method	required values	result
	water absorbtion	ISO 10545-3	E < = 0,04 %	complies
	bending strength	ISO 10545-4	-	53 N/mm2
	resistance to deep abrasion	ISO 10545-6	<128 mm3	complies
	thermal shock resistance	ISO 10545-9	requested	complies
	abrasion resistance	ISO 10545-7	-	class 5
	chemical resistance	ISO 10545-13	-	UA ULA UHA
	resistance to frost	ISO 10545-12	requested	complies
	staining resistance	ISO 10545-14	Minimum Class 3	Class 5