

# Zellij



**PRODUCT TYPE:** Ceramic Wall Tile

**COLOURS:** White, Nimbus, Mint, Celeste, Soft Olive, Earth, Neutral Grey, Cotto, Forest Green, Ocean Blue, Indigo and Black

**SIZES:** 100x100mm  
Non-Rectified edges


**FINISHES/USAGE:** Gloss/ Wall Only

**AESTHETIC QUALITIES:** Organic colour range and glossy surface

**ORIGIN:** Italy

**TECHINICAL INFO:** More technical info on the last page

**VARIATION:**



V4


Imported from Italy, our ZELLIJ Series is inspired by Moroccan Zellige tiles and features a solid range of organic colours with strong variation. Available in a 100x100mm format for wall only.

# Zelij

## PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
100x100mm	GLOSS	-	NON-RECTIFIED

## FORMATS



WHITE GLOSS



NIMBUS GLOSS



MINT GLOSS




CELESTE GLOSS

# Zellij

## PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
100x100mm	GLOSS	-	NON-RECTIFIED

## FORMATS




SOFT OLIVE GLOSS



EARTH GLOSS



NEUTRAL GREY GLOSS

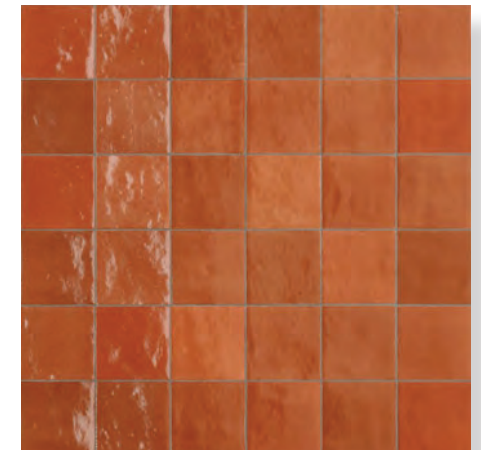


COTTO GLOSS

# Zelij

## PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
100x100mm	GLOSS	-	NON-RECTIFIED


## FORMATS




FOREST GREEN GLOSS



OCEAN BLUE GLOSS

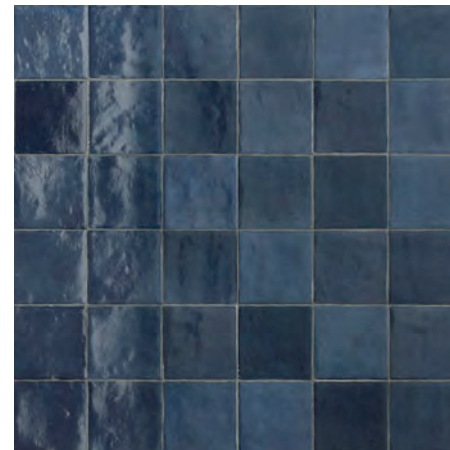

INDIGO GLOSS

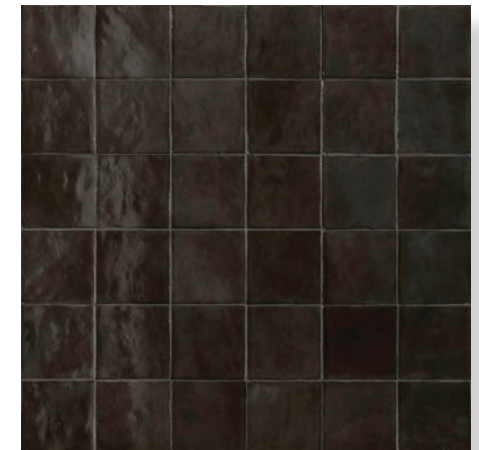

BLACK GLOSS


# Zelij




# Zelij



# Zelij

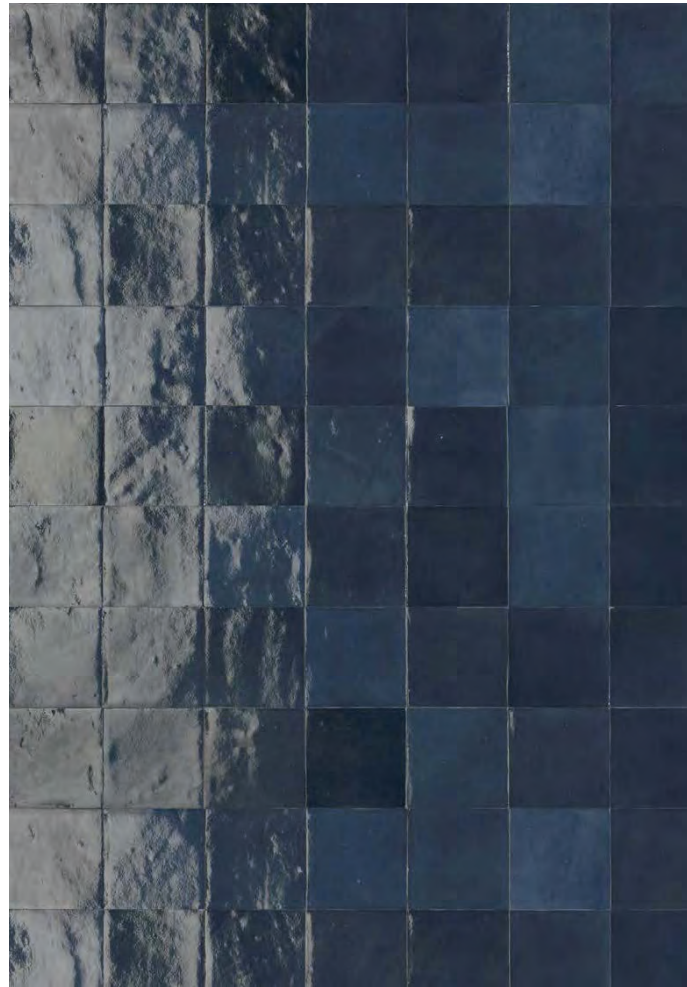



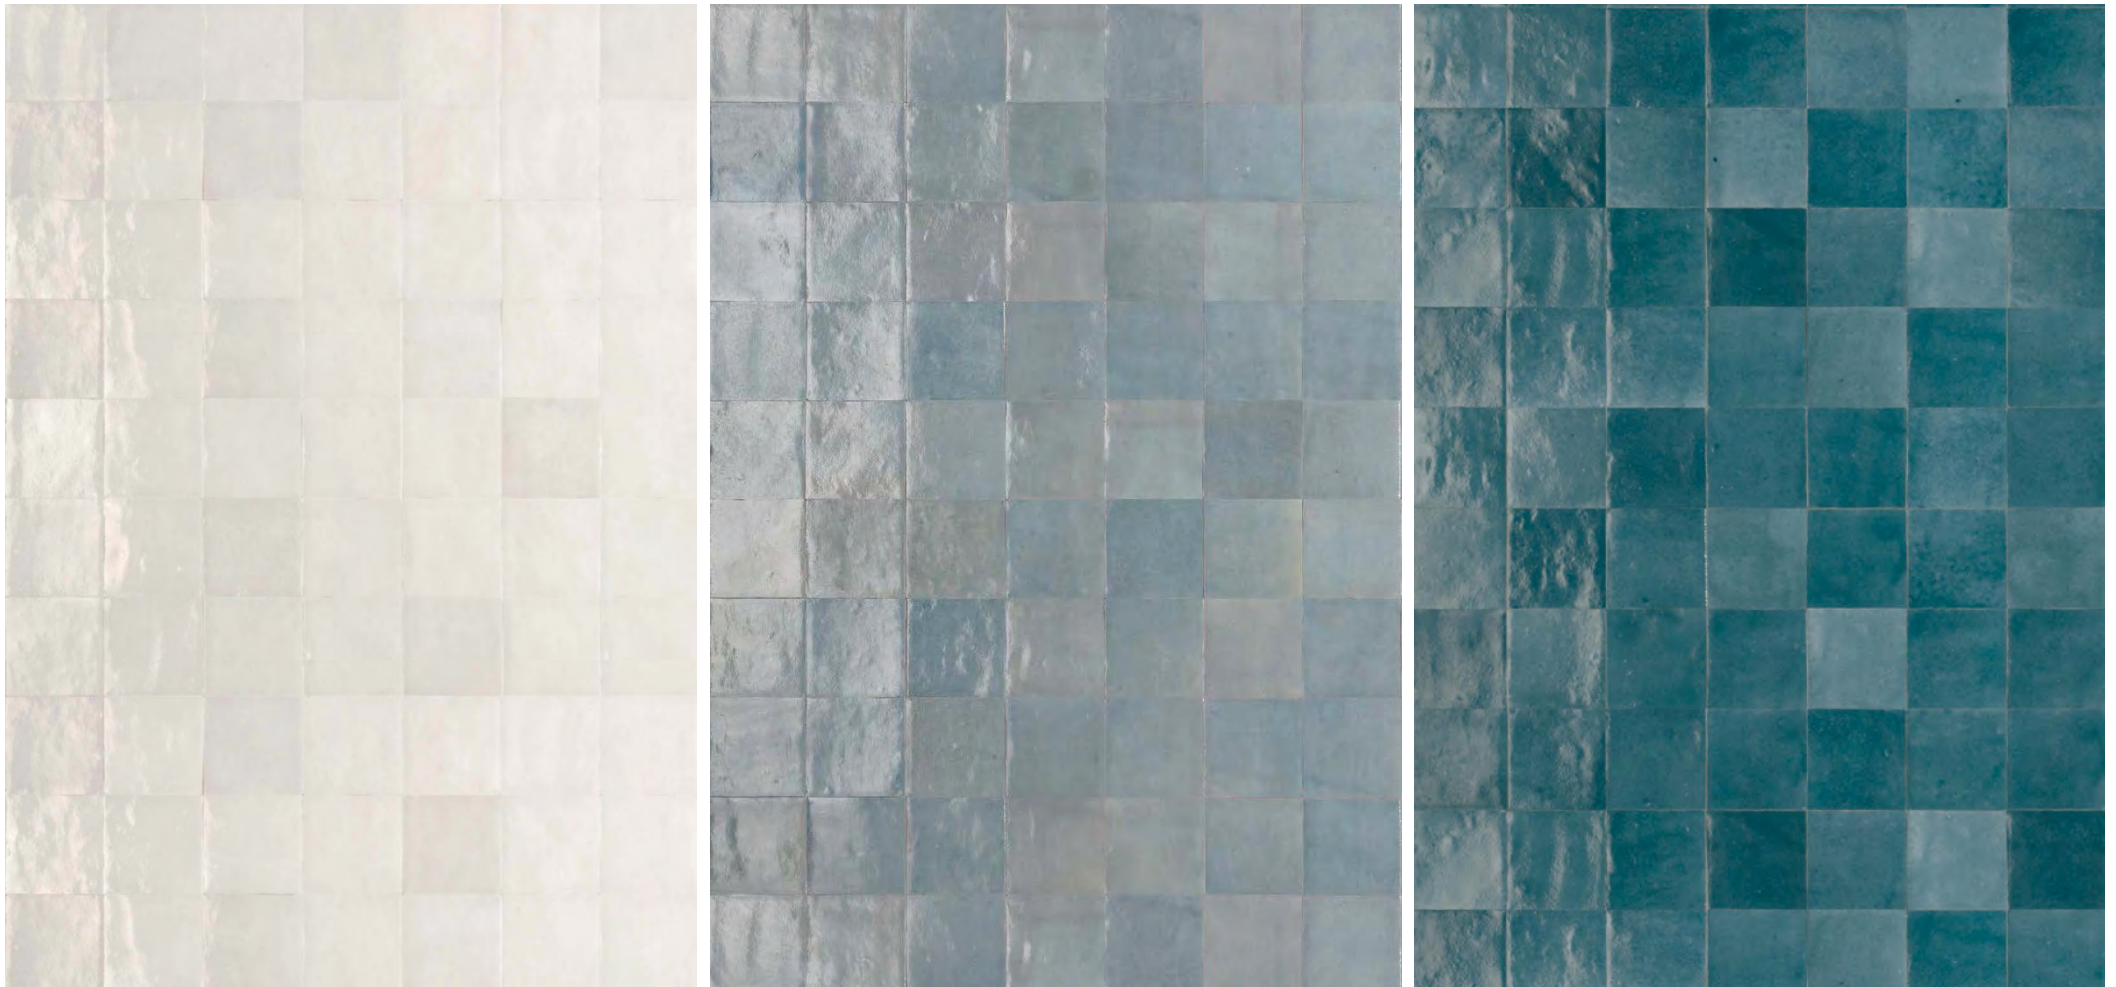





# Zelij





## TECHNICAL DATA

	technical characteristics	test method	required values	result
	water absorption	ISO 10545-3	≤0.5%	Eb ≤0,5 (Individual maximum value 0,6%)
	modulus of rupture	ISO 10545-4	≥35	R ≥35 (Individual minimum value 32 N/mm <sup>2</sup> )
	surface quality	ISO 10545-2	Complies with the standards	≥95%
	breaking strength	ISO 10545-4	≥1300	≥1300 (Thickness ≥7,5 mm) ≥700 (Thickness < 7,5 mm)
	crazing resistance	ISO 10545-11	Pass	Pass
	chemical resistance	ISO 10545-13	Declared value	Pass
	resistance to frost	ISO 10545-12	Resistant	Pass
	staining resistance	ISO 10545-14	Minimum Class 3	Pass