

Zellij Brick



PRODUCT TYPE: Glazed Porcelain Wall Tile

COLOURS: White, Greige, Green, Blue, Musk and Black

SIZES: 60x240mm
Non-Rectified edges


FINISHES/USAGE: Gloss/ Wall Only

AESTHETIC QUALITIES: Organic colour range and glossy surface

ORIGIN: Italy

TECHNICAL INFO: More technical info on the last page

VARIATION:



V4

Imported from Italy, our ZELLIJ BRICK Series is inspired by Moroccan Zellige tiles and features a solid range of organic colours with strong variation. Available in a 60x240mm brick format for internal and external wall only.

Zelij Brick

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
60x240mm	GLOSS	-	NON-RECTIFIED

FORMATS


60x240mm



WHITE GLOSS



GREIGE GLOSS

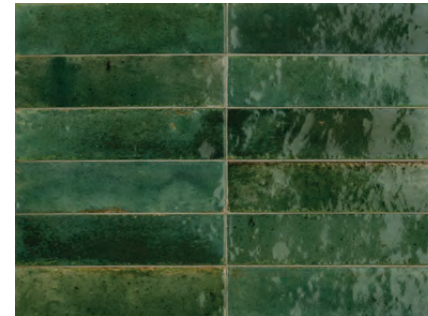


GREEN GLOSS



BLUE GLOSS



MUSK GLOSS

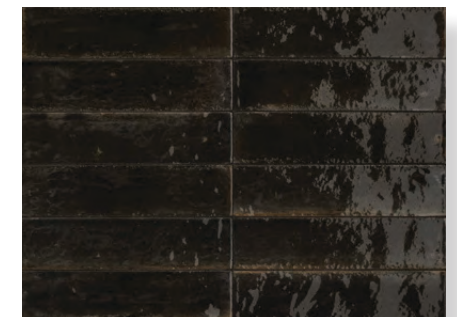

BLACK GLOSS

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

Zelij Brick



Zelij Brick





Zelij Brick



Zellij Brick





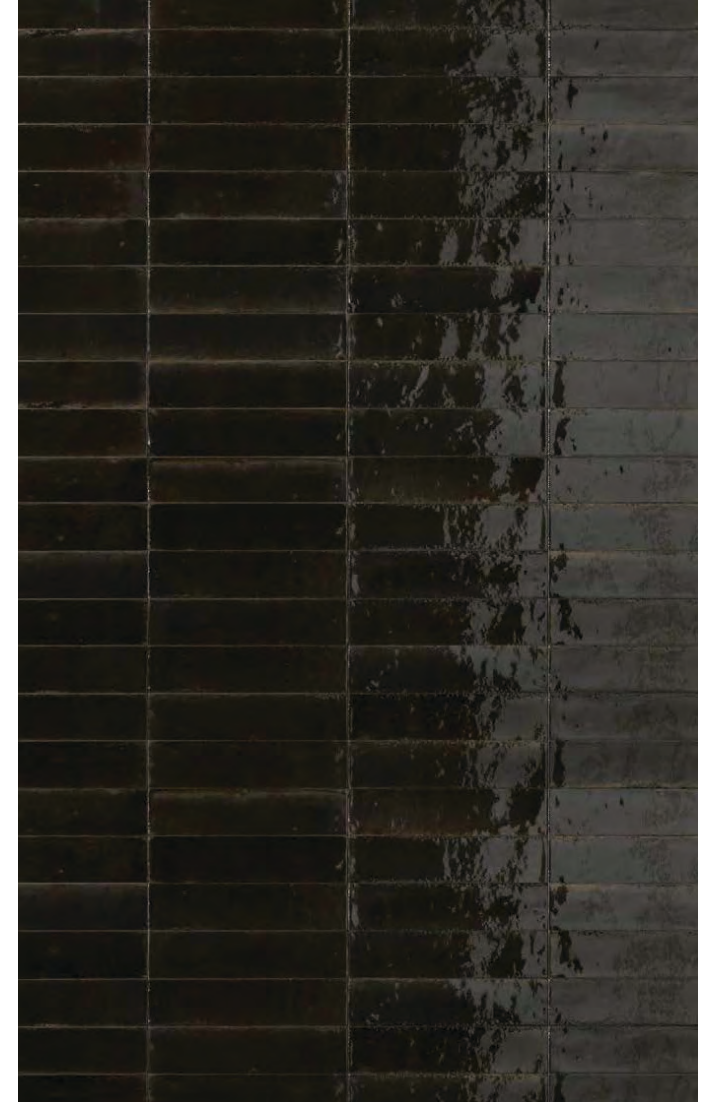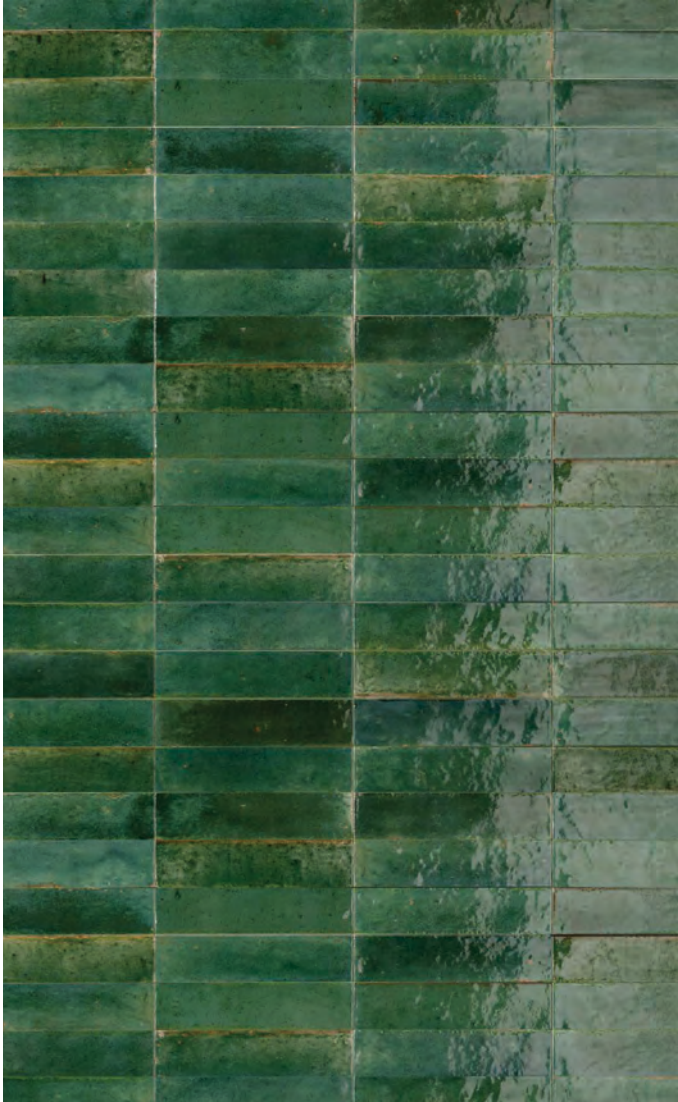





Zelij Brick



Zelij Brick

TECHNICAL DATA

	technical characteristics	test method	required values	result
	water absorption	ISO 10545-3	≤0.5%	Eb ≤0,5 (Individual maximum value 0,6%)
	modulus of rupture	ISO 10545-4	≥35	R ≥35 (Individual minimum value 32 N/mm ²)
	surface quality	ISO 10545-2	Complies with the standards	≥95%
	breaking strength	ISO 10545-4	≥1300	≥1300 (Thickness ≥7,5 mm) ≥700 (Thickness < 7,5 mm)
	crazing resistance	ISO 10545-11	Pass	Pass
	chemical resistance	ISO 10545-13	Declared value	Pass
	resistance to frost	ISO 10545-12	Resistant	Pass
	staining resistance	ISO 10545-14	Minimum Class 3	Pass