



Tecnica, a special series providing efficient anti-slip protection assuring safety and solidity. Thanks to its unglazed structure it is extremely durable and resistant to wear and tear in high traffic areas.

PRODUCT TYPE: Unglazed porcelain

COLOURS: Light Grey, Charcoal, Fine Black and

Mono Black

SIZES: 100x200mm (Cove) 200x200mm and

100x100mm (Mosaic) Non-Rectified edges

FINISHES/USAGE: Matt, Pro and Diamond/Floor

AESTHETIC QUALITIES: Unglazed porcelain for commercial use

TECHINICAL INFO: P3 Pendulum slip rating (Matt)

P4 Pendulum slip rating (Pro)

R13 (Diamond)

More technical data on the last page.

ORIGIN: Turkey

VARIATION:






PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATINGS	TILE EDGE
200x200mm	MATT	P3 Pendulum	NON-RECTIFIED
100x100mm	MATT MOSAIC	P3 Pendulum	NON-RECTIFIED
200x200mm	PRO	P4 Pendulum	NON-RECTIFIED
100x200mm	MATT COVE	-	NON-RECTIFIED

FORMATS



LIGHT GREY



MATT AND PRO

MATT MOSAICS




COVE




PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATINGS	TILE EDGE
200x200mm	MATT	P3 Pendulum	NON-RECTIFIED
100x100mm	MATT MOSAIC	P3 Pendulum	NON-RECTIFIED
200x200mm	PRO	P4 Pendulum	NON-RECTIFIED
100x200mm	MATT COVE	-	NON-RECTIFIED

FORMATS



MONO BLACK

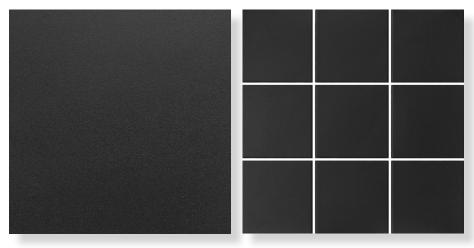

MATT AND PRO

MATT MOSAICS



COVE




PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATINGS	TILE EDGE
200x200mm	MATT	P3 Pendulum	NON-RECTIFIED
100x100mm	MATT MOSAIC	P3 Pendulum	NON-RECTIFIED
200x200mm	PRO	P4 Pendulum	NON-RECTIFIED
200x200mm	DIAMOND	R13+ V4	NON-RECTIFIED
100x200mm	MATT COVE	-	NON-RECTIFIED

FORMATS

100x100mm 100x200mm

CHARCOAL

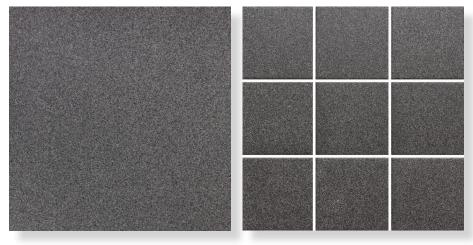

MATT AND PRO MATT MOSAICS





PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATINGS	TILE EDGE
200x200mm	MATT	P3 Pendulum	NON-RECTIFIED
100x100mm	MATT MOSAIC	P3 Pendulum	NON-RECTIFIED
200x200mm	PRO	P4 Pendulum	NON-RECTIFIED
200x200mm	DIAMOND	R13+ V4	NON-RECTIFIED
100x200mm	MATT COVE	-	NON-RECTIFIED


FORMATS

100x100mm 100x200mm

FINE BLACK



MATT AND PRO MATT MOSAICS

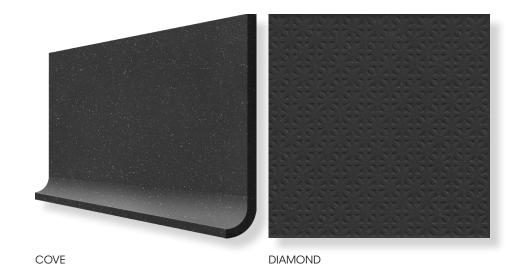



	technical characteristics	test method	required values	value
888	water absorption	iso 10545-3	≤ 0,5%	≤ 0,5% (Approx. 0,05%)
	frost resistance	iso 10545-12	no alterations	resistant
<u>6</u>	breaking strength (S)	iso 10545-4	Min. 1300N For thickness≥ 7,5mm Min. 700N For thickness<7,5mm	>700N (100x100mm) >1300N (200x200mm +300x300mm)
± [thermal shock resistance	iso 10545-9	test method available	resistant
2	stain resistance	iso 10545-14	test method available	class 3

ENVIRONMENTAL CERTIFICATION







ISO:14001 2004