

Toronto



PRODUCT TYPE: Glazed Porcelain

COLOURS: Pearl and Ash

SIZES: 300x300mm, 300x600mm, 600x600mm


FINISHES/USAGE: Rectified edges

AESTHETIC QUALITIES: Matt, Semi-Polished & Grip/Wall & floor

The digital system guarantees realistic, authentic colouring, with variations in texture and patterning.

TECHNICAL DATA: P3 Pendulum slip rating (Matt)
P4 Pendulum slip rating (Grip)
More technical data on the last page

VARIATION:



V3


TORONTO is produced using hi-definition inkjet technology to recreate a crosscut stone look.

Toronto

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
300x300mm	MATT	P3 Pendulum	RECTIFIED
300x600mm	MATT	P3 Pendulum	RECTIFIED
600x600mm	MATT	P3 Pendulum	RECTIFIED
300x600mm	SEMI POLISHED	–	RECTIFIED
300x600mm	SEMI POLISHED	–	RECTIFIED

FORMATS

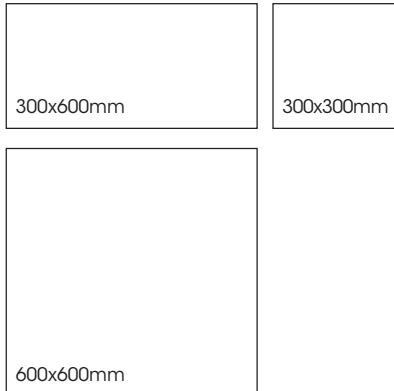

PEARL MATT



PEARL SEMI-POLISHED



Toronto

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
300x300mm	MATT	P3 Pendulum	RECTIFIED
300x600mm	MATT	P3 Pendulum	RECTIFIED
600x600mm	MATT	P3 Pendulum	RECTIFIED
300x600mm	SEMI POLISHED	–	RECTIFIED
300x600mm	SEMI POLISHED	–	RECTIFIED
300x600mm	GRIP	P4 Pendulum	RECTIFIED
600x600mm	GRIP	P4 Pendulum	RECTIFIED



ASH MATT




ASH SEMI-POLISHED



ASH GRIP







FORMATS



Toronto



TECHNICAL DATA

	technical characteristics	test method	required values	value
	Group B I a			
	water absorption	iso 10545-30	≤ 0.5%	.21%
	bending strength	iso 10545-4	≥ 12MPA	≥ 33.5MPA
	breaking strength (S)	iso 10545-4	≥ 350 N	≥ 1785N
	abrasion resistance	iso 10545-7	Max. 175 mm ³ PEI 1-5	Class3
	chemical resistance	iso 10545-13	Household chemicals and swimming pool salts	GA
			Low concentration of acids and alkalis	GLA
	stain resistance	iso 10545-14	Minimum Class 3	Class 5