

Deko



PRODUCT TYPE: Glazed Porcelain

COLOURS: Ocre, Garnet, Cobalt, Jade, Terra and Olive


SIZES: 100x100mm (sheeted)
Non-Rectified edges

FINISHES/USAGE: Gloss/Wall only

AESTHETIC QUALITIES: Bright modern colours

TECHNICAL INFO: More technical info on the last page

VARIATION:



V2

DEKO, our new range of bright 100x100mm mosaic tiles featuring soft variation and a glossy finish. Perfect to create eye-catching splashbacks and feature walls and is suitable for walls only.


Deko

PRODUCT SPECIFICATIONS


SIZES	FINISHES	SLIP RATING	TILE EDGE
100x100mm	GLOSS	-	NON-RECTIFIED

*Indent item - Subject to stock availability overseas, please allow 10-12 weeks lead time from date of order confirmation. Minimum quantity may apply.


FORMATS

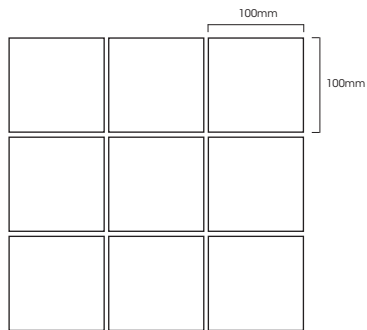

Sheet size | 300x300mm

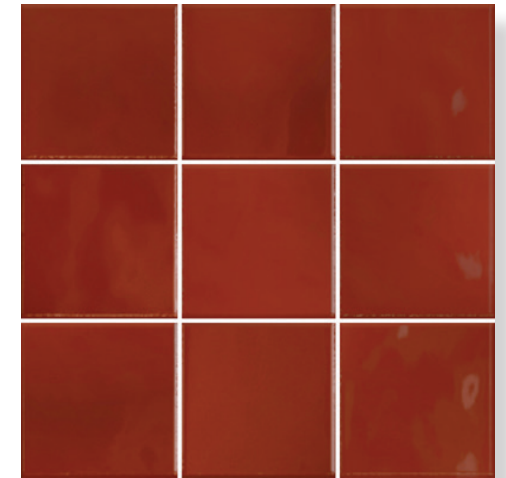

GARNET

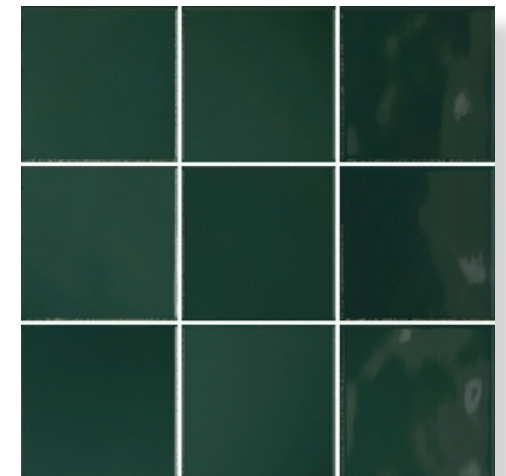

JADE

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.


Deko

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
100x100mm	GLOSS	-	NON-RECTIFIED

*Indent item - Subject to stock availability overseas, please allow 10-12 weeks lead time from date of order confirmation. Minimum quantity may apply.

FORMATS

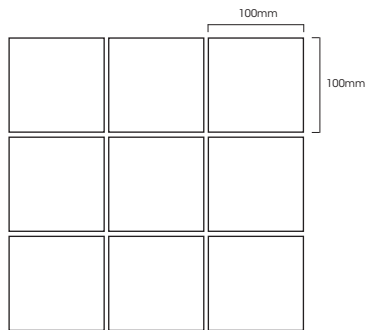

Sheet size | 300x300mm



OCRE



COBALT

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.


Deko

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
100x100mm	GLOSS	-	NON-RECTIFIED

*Indent item - Subject to stock availability overseas, please allow 10-12 weeks lead time from date of order confirmation. Minimum quantity may apply.


FORMATS

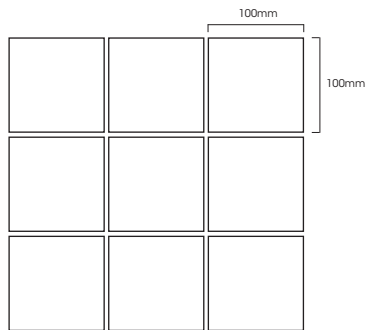

Sheet size | 300x300mm



TERRA - COMING SOON 2021

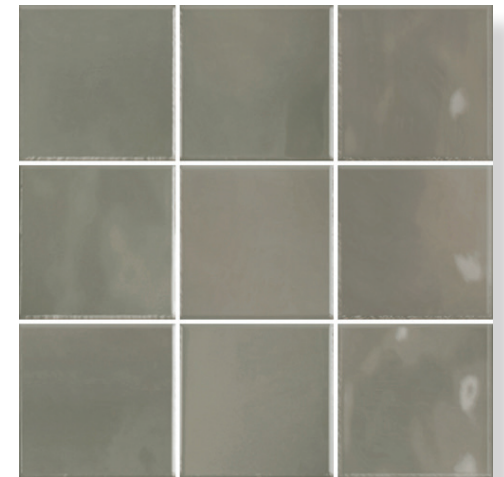

OLIVE - COMING SOON 2021









Deko



Deko



TECHNICAL DATA

	technical characteristics	test method	result
	water absorption	ISO 10545-3	0,5% < E ± 3,0 %
	modulus of rupture	ISO 10545-4	Min. 30 N/mm ²
	surface quality	ISO 10545-2	≥95%
	breaking strength	ISO 10545-4	Min. 1100 N (t≥7,5mm) Min. 700 N (t<7,5mm)
	crazing resistance	ISO 10545-11	Pass
	chemical resistance	ISO 10545-13	Pass
	resistance to frost	ISO 10545-12	Pass
	staining resistance	ISO 10545-14	Pass