

Cleft



A sleek interpretation of slate, CLEFT Series features realistic textures and irregularities of this beautiful natural stone. Available in four colours and two finishes suitable for both wall and floor.

PRODUCT TYPE: Glazed, colour bodied porcelain

COLOURS: Tawn, Sky Gray, Midnight Ash and Hampshire


SIZES: 75x300mm, 300x600mm and 600x600mm
Rectified Edges

FINISHES/USAGE: Natural and Grip/Wall and Floor

AESTHETIC QUALITIES: Natural Slate look

TECHNICAL INFO: P3 Pendulum slip rating (Natural)
P5 Pendulum slip rating (Grip)
More technical data on the last page

VARIATION:



V3

Cleft


TAWN

PRODUCT SPECIFICATIONS

SIZES	FINISHES	TILE EDGE	SLIP RATING
75x300mm	NATURAL	RECTIFIED	P3 Pendulum
300X600mm	NATURAL	RECTIFIED	P3 Pendulum
600x600mm	NATURAL	RECTIFIED	P3 Pendulum
300X600mm	GRIP	RECTIFIED	P5 Pendulum




NATURAL

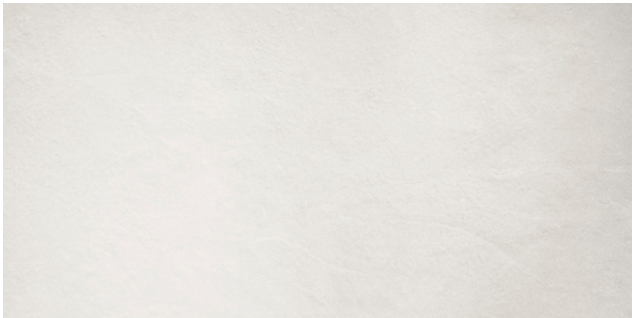


GRIP

FORMATS

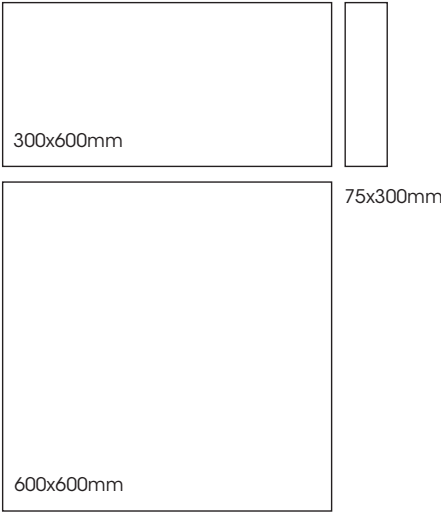

SKY GRAY

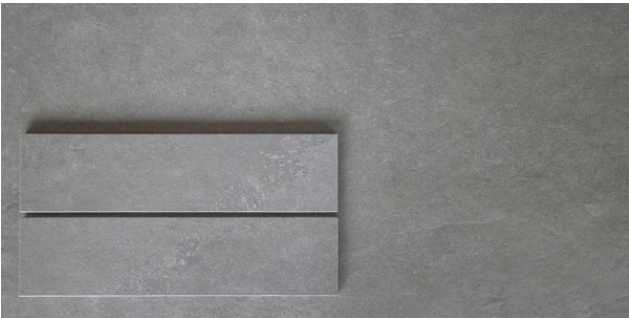

NATURAL



GRIP

Cleft

MIDNIGHT ASH

PRODUCT SPECIFICATIONS

SIZES	FINISHES	TILE EDGE	SLIP RATING
75x300mm	NATURAL	RECTIFIED	P3 Pendulum
300X600mm	NATURAL	RECTIFIED	P3 Pendulum
600x600mm	NATURAL	RECTIFIED	P3 Pendulum
300X600mm	GRIP	RECTIFIED	P5 Pendulum




NATURAL




GRIP

FORMATS

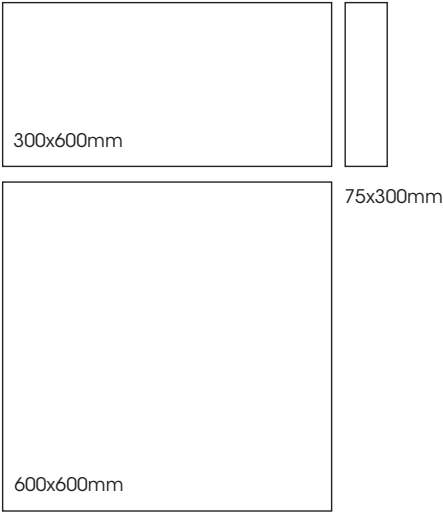

HAMPSHIRE

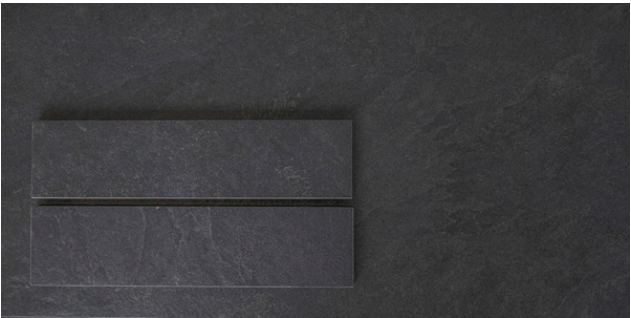

NATURAL



GRIP









Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

Cleft



Cleft



technical characteristics		test method	required values	result
	water absorption	ISO 10545-3	≤0.5%	≤0.5%
	modulus of rupture	ISO 10545-4	≥35	≥38
	surface quality	ISO 10545-2	Full compliance	complies
	breaking strength	ISO 10545-4	≥1100	3500
	crazing resistance	ISO 10545-11	Pass	Pass
	chemical resistance	ISO 10545-13	Declared value	ULA UHB
	resistance to frost	ISO 10545-12	resistant	resistant
	staining resistance	ISO 10545-14	Minimum Class 3	Class 5