

Contour



PRODUCT TYPE: Glazed colour bodied porcelain

COLOURS: White, Grey and Charcoal


SIZES: 300x300mm, 300x600mm
600x600mm and 75x600mm
Rectified edges

FINISHES/USAGE: Textured/Wall and Floor

AESTHETIC QUALITIES: Slate-like

TECHNICAL INFO: P4 Pendulum slip rating (Textured)
More technical data on the last page

VARIATION:



V2



The subtle slate-like texture and porcelain physical characteristics makes for an aesthetically pleasing series suitable in both floor and wall applications. The appearance of CONTOUR is complimented by the range of sizing and the P4 Pendulum slip rating, providing a versatile series.

Contour


PRODUCT SPECIFICATIONS

| SIZES | FINISHES | SLIP RATING | TILE EDGE |
|-----------|----------|-------------|-----------|
| 300x300mm | TEXTURED | P4 Pendulum | RECTIFIED |
| 300x600mm | TEXTURED | P4 Pendulum | RECTIFIED |
| 600X600mm | TEXTURED | P4 Pendulum | RECTIFIED |
| 75x600mm | TEXTURED | P4 Pendulum | RECTIFIED |

FORMATS

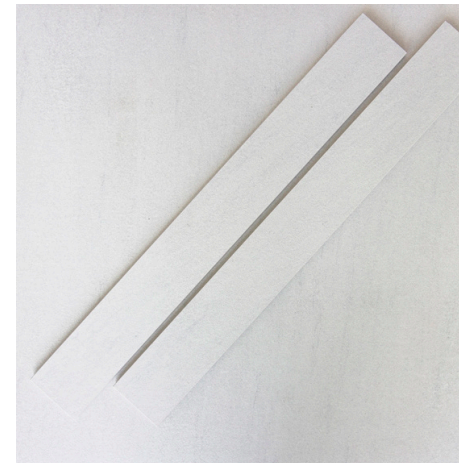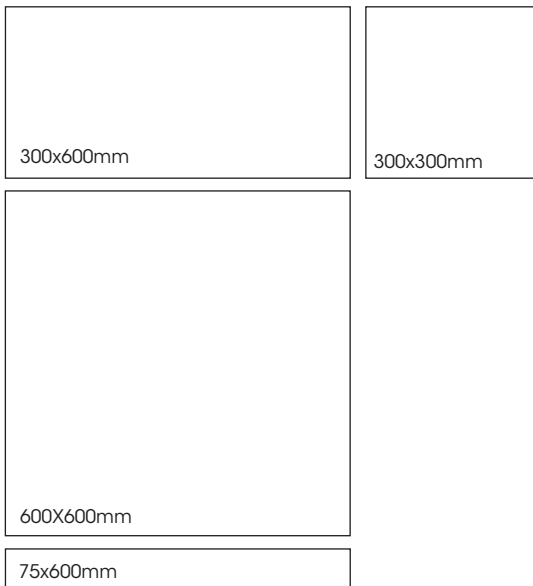

WHITE TEXTURED

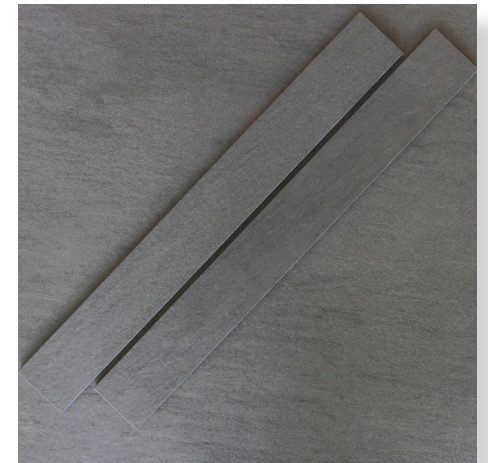

GREY TEXTURED









CHARCOAL TEXTURED

Contour



TECHNICAL DATA

| | technical characteristics | test method | standard | test result |
|---|-----------------------------------|--------------|---|---|
|  | water absorption | iso 10545-3 | average E \leq 0.5% individual maximum 0.06% | average: 0.15% individual maximum: 0.16% |
|  | resistance to deep abrasion | iso 10545-6 | report abrasion class and cycles passed | class 3 |
|  | breaking strength (S) | iso 10545-4 | 35MPa | pass |
|  | thermal shock resistance | iso 10545-9 | test method available | pass |
|  | resistance to household chemicals | iso 10545-13 | minimum GB | pass |
|  | stain resistance | iso 10545-14 | minimum class 3 | pass |