

Tibet



PRODUCT TYPE: Glazed Porcelain Floor Tile

COLOURS: Pearl, Greige, Gris and Grafito


SIZES: 60x200mm, 300x300mm, 300x600mm,
600x600mm, 600x1200mm and
600x600x20mm Paver
Rectified edges

FINISHES/USAGE: Matt and Grip
Floor and wall

AESTHETIC QUALITIES: Mixed Stone look

TECHINICAL INFO: P2 Pendulum slip rating (Matt)
P4 Pendulum slip rating (Grip)
More technical info on the last page

VARIATION:



V3

TIBET realistically represents a mixture of stone surfaces with a focus on texture and natural colour. Available in a wide range of sizes and two finishes, TIBET can be used for both residential and commercial applications.


Tibet

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
60x200mm	MATT	P2 Pendulum	RECTIFIED
300x300mm	MATT	P2 Pendulum	RECTIFIED
300x600mm	MATT	P2 Pendulum	RECTIFIED
600x600mm	MATT	P2 Pendulum	RECTIFIED
600x1200mm	MATT	P2 Pendulum	RECTIFIED
300x600mm	GRIP	P4 Pendulum	RECTIFIED
600x600mm	GRIP	P4 Pendulum	RECTIFIED
600x600x20mm	GRIP PAVER	P4 Pendulum	RECTIFIED

*Please note, 600x1200mm Matt is only available in Pearl and Gris

FORMATS

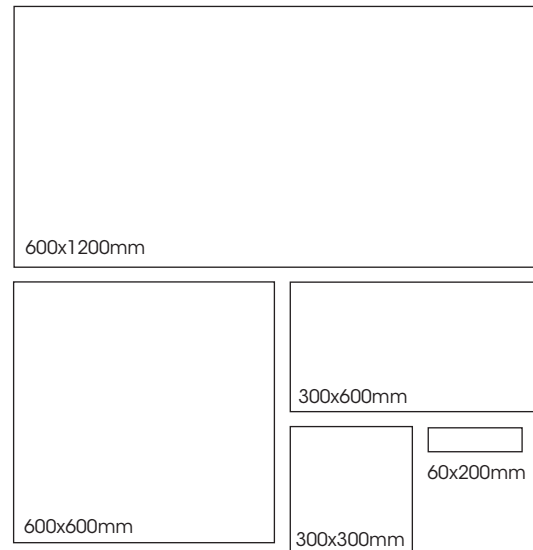

PEARL*



GREIGE*



GRIS



GRAFITO

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

BRICK FLATLAY EXAMPLES



Tibet

PEARL VARIATION




Tibet

GREIGE VARIATION




Tibet

GRIS VARIATION

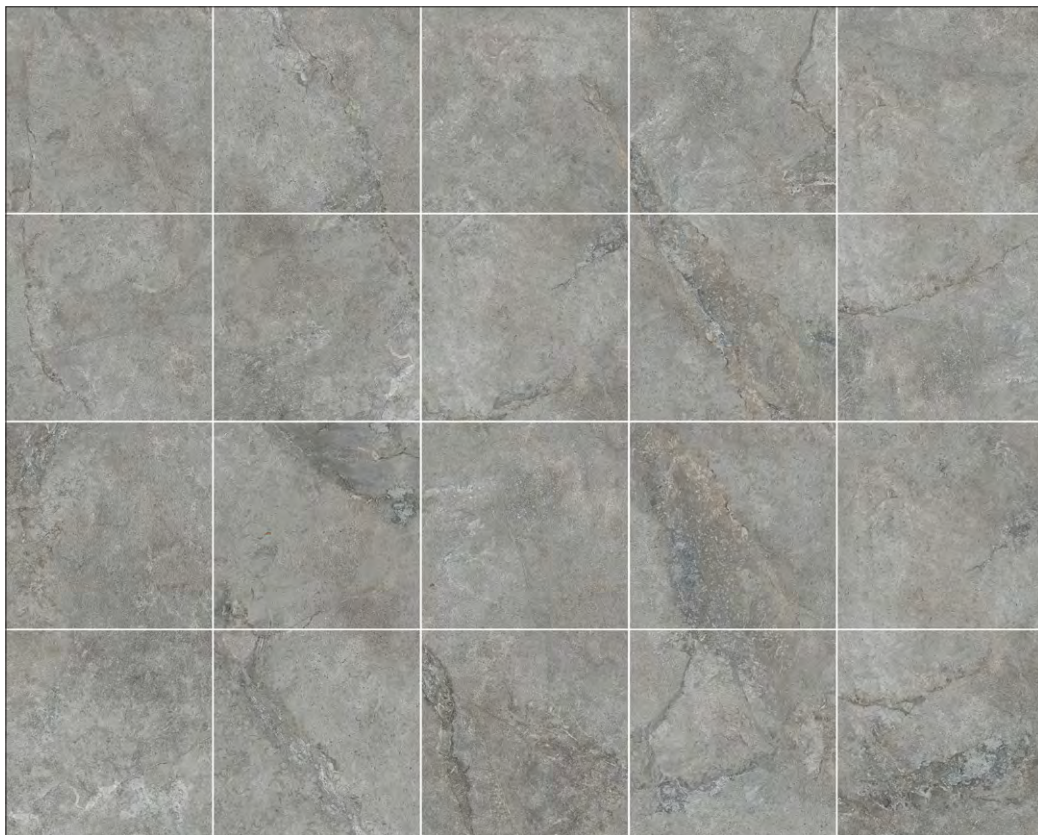

Tibet

GRAFITO VARIATION

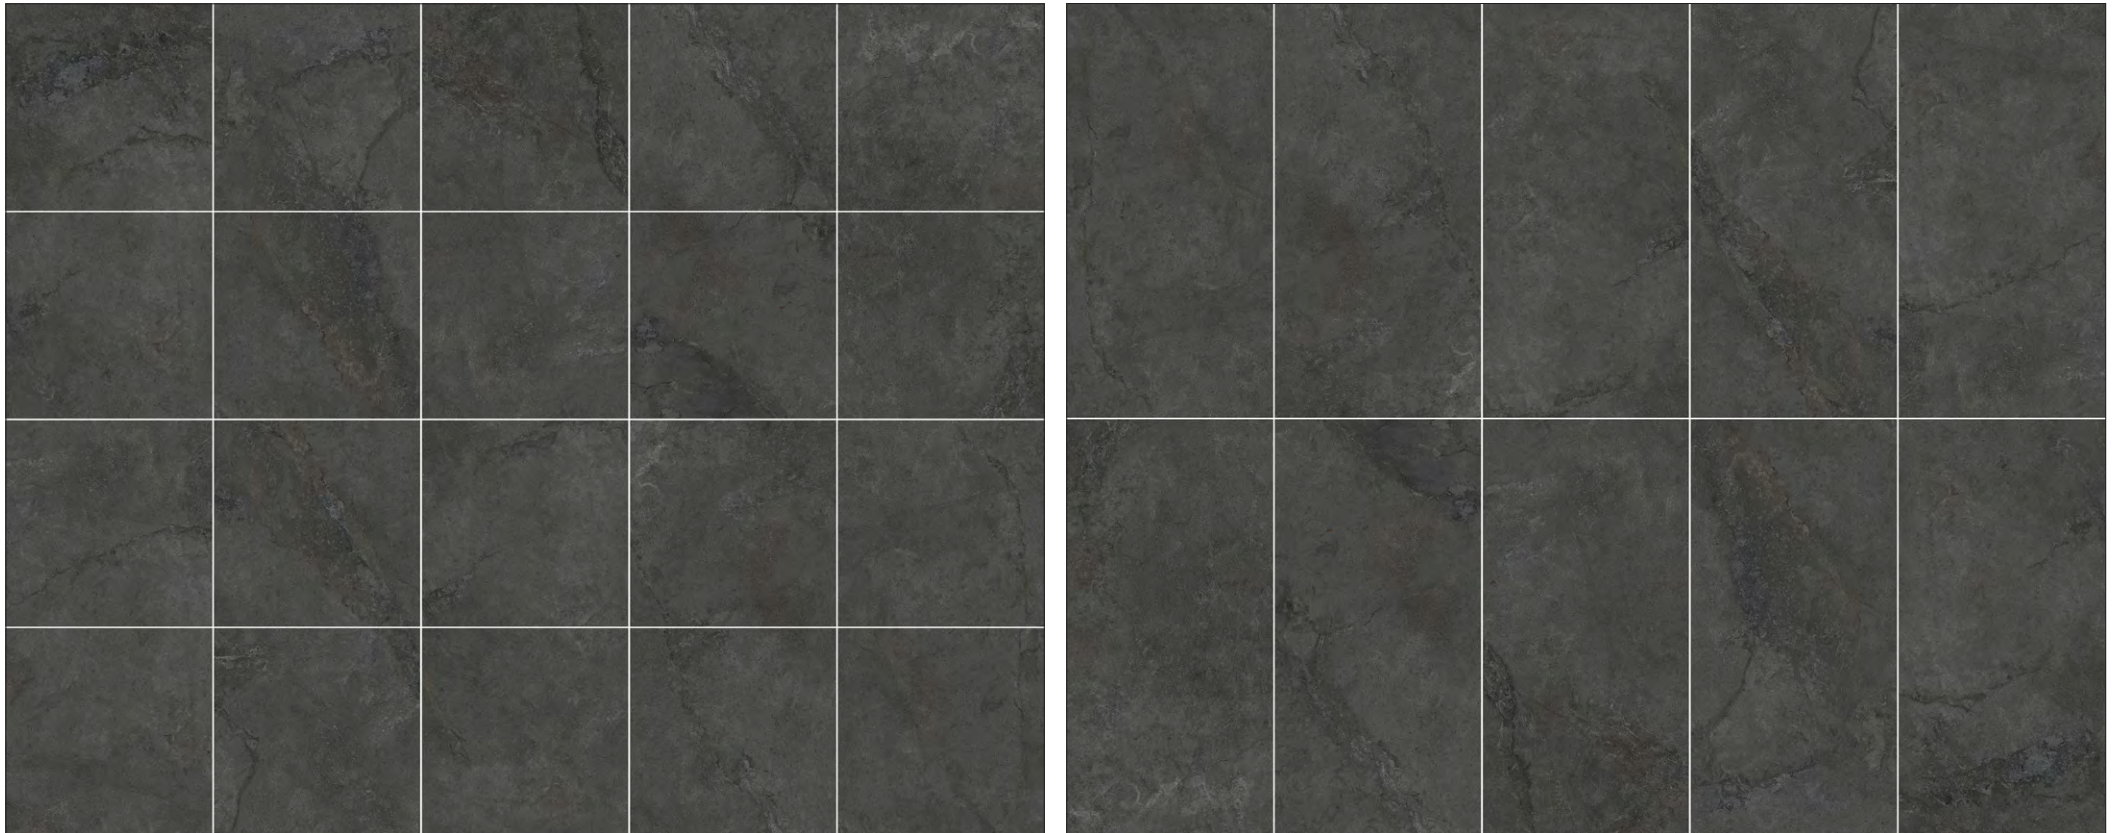

Tibet









Tibet



Tibet



TECHNICAL DATA

	technical characteristics	test method	required values	result
	water absorption	ISO 10545-3	≤0.5%	≤0.5%
	breaking strength	ISO 10545-4	≥1300N	2265N
	shock resistance	ISO 10545-11	Pass	Pass
	chemical resistance	ISO 10545-13	Declared value	Pass
	resistance to frost	ISO 10545-12	Resistant	Pass
	staining resistance	ISO 10545-14	Minimum Class 3	Pass