

Pantalla



Decorative screen walls are making a come back and PANTALLA is the perfect solution to adding an element of privacy without interrupting your space with a solid wall. It's gleaming glaze, unique design and style, allows light to softly filter through, creating a striking visual statement. PANTALLA is available in other patterns and colour, available upon request.

PRODUCT TYPE: Ceramic gloss brick

COLOURS: One Black, Two Wine Red and Three White

SIZES: 283x133mm, 177x173mm and
293x143mm

FINISHES/USAGE: Gloss/Decorative Screen


AESTHETIC QUALITIES: Decorative, geometric pattern

TECHINICAL INFO: Specifications
Firing Cycle 300 min.
Temperature 1200 °C
Modulus of Rupture 500kg/cm²
Water Absorption <1%

Laying instructions on each page. More information on the last page.

ORIGIN: Italy

VARIATION:




V1

Pantalla

PRODUCT SPECIFICATIONS

SIZES	FINISHES
283x133mm	GLOSS


FORMATS

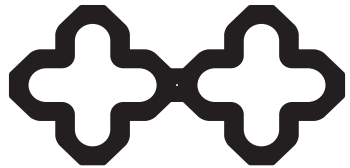



283x133mm

Other colours and finishes available with a minimum 500 piece order.

ONE BLACK

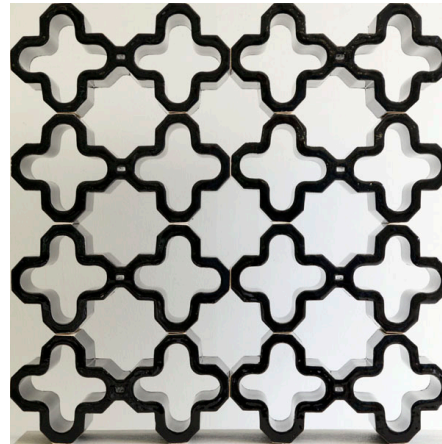

GLOSS

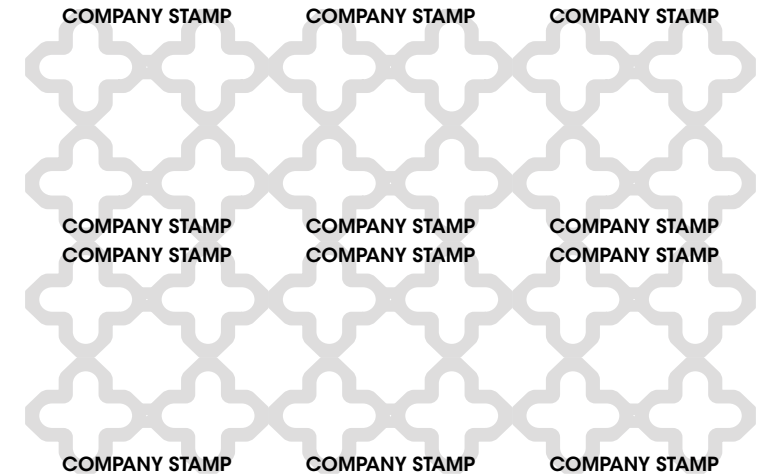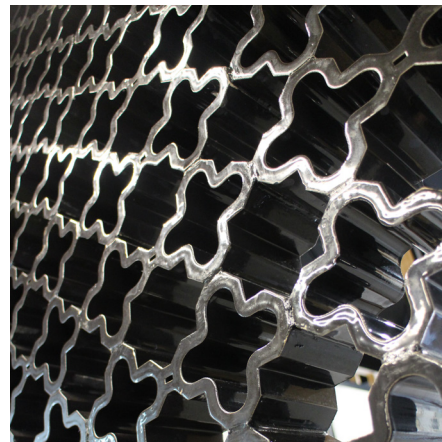

ASSEMBLE LAYOUT


Each individual brick has a company stamp on one edge. The diagram shows the assemble layout for each pattern using the company stamp as the reference.

Pantalla

PRODUCT SPECIFICATIONS

SIZES	FINISHES
177x173mm	GLOSS


FORMATS




177x173mm

Other colours and finishes available with a minimum 500 piece order.

TWO RED WINE

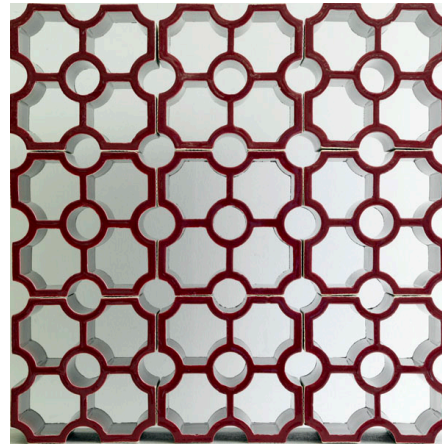

GLOSS

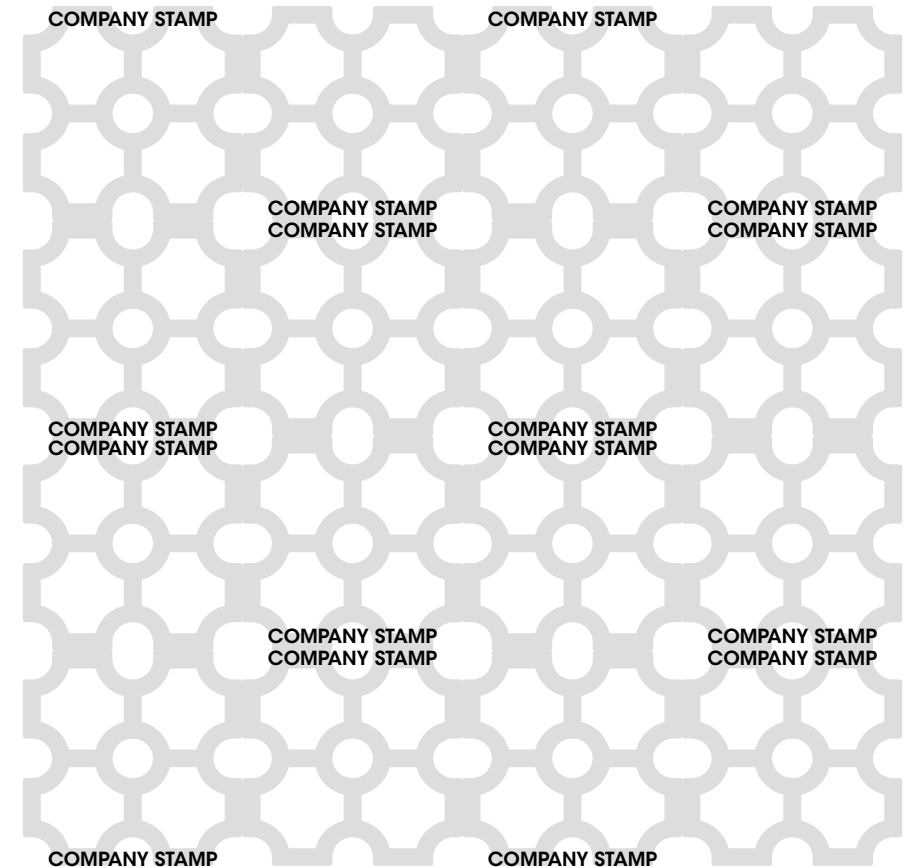

ASSEMBLE LAYOUT


Each individual brick has a company stamp on one edge. The diagram shows the assemble layout for each pattern using the company stamp as the reference.

Pantalla

PRODUCT SPECIFICATIONS

SIZES	FINISHES
293x143mm	GLOSS


FORMATS

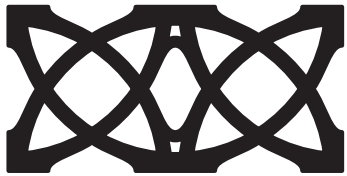



293x143mm

Other colours and finishes available with a minimum 500 piece order.

THREE WHITE

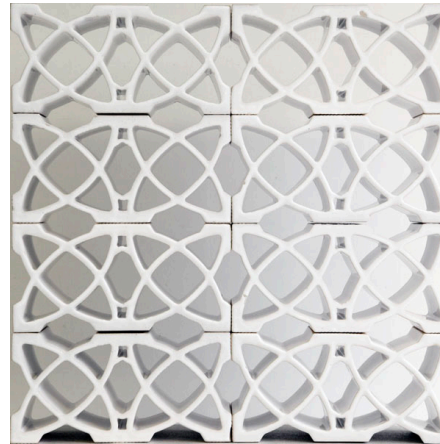

GLOSS

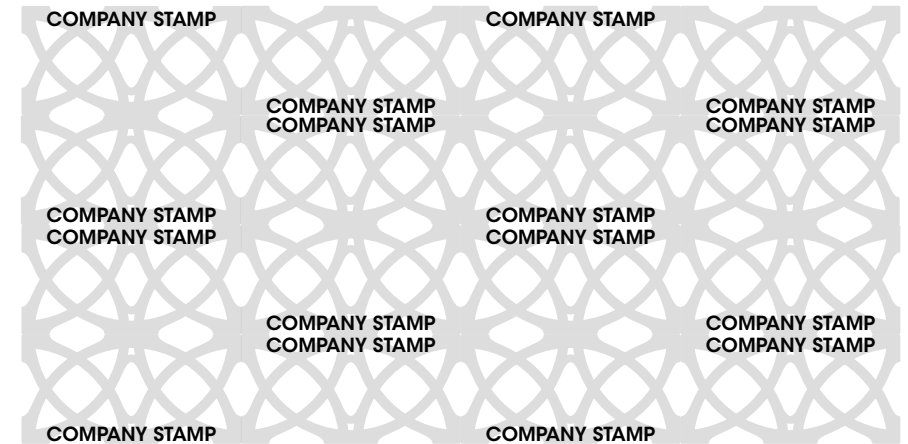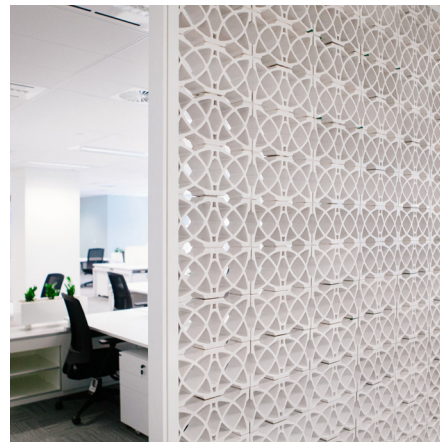

ASSEMBLE LAYOUT

Each individual brick has a company stamp on one edge. The diagram shows the assemble layout for each pattern using the company stamp as the reference.

Pantalla

BONDING REQUIRED


The adhesive recommend to erect a wall is a mortar adhesive such as MAPEI GRANIRAPID. This is a quick drying and very strong adhesive. Another alternative is to use a CO-POLYMER sealant, which can be applied using a silicone gun. This a strong adhesive and is also available in a transparent form. This alternative may be a little more expensive.

FREE STANDING WALLS SIZES

The maximum size of a Ceramic Screen Wall, where the pattern is 100mm in thickness is 3000mm in height by 3000mm in width.

FRAME SIZE

A "U" extruded frame is required around the Pantalla Decorative Screen Walls to help stability especially with larger size walls. The frame can be made from timber or an anodised aluminium "U" section. For the 100mm in thick Pantalla, the internal measurement of the "U" frame should be 104mm wide and 25mm high internally. Skheme has 3m length aluminium extrusions available in black anodised (pictured below), white anodised and raw aluminium. The extrusion has been certified by an engineer.

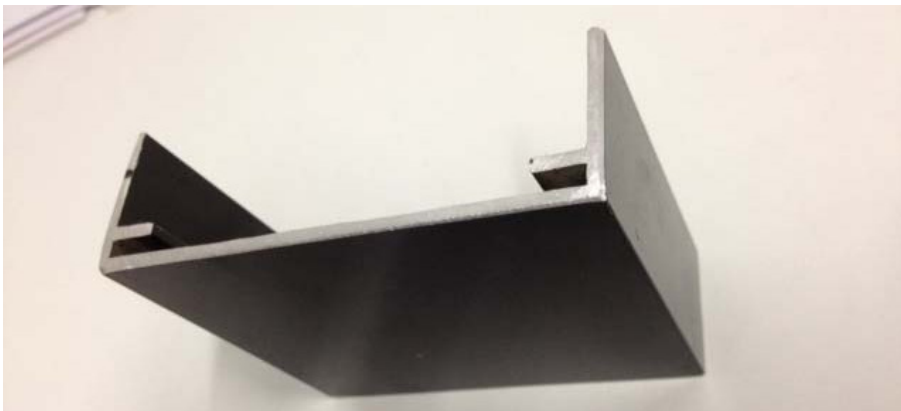

Pantalla

