

skheme®

classic




classic



300x300mm



300x600mm



600x600mm



600x1200mm



P3 slip rating



V1

PRODUCT SPECIFICATIONS

format	size	finish	thickness	slip rating	colour
tile	300x300mm	semi-matt	10mm	P1	white
tile	300x600mm	semi-matt	10mm	P1	white
tile	600x600mm	semi-matt	10mm	P1	white
tile	600x1200mm	semi-matt	10mm	P1	white
tile	300x300mm	matt	10mm	P3	black
tile	300x600mm	matt	10mm	P3	black
tile	600x600mm	matt	10mm	P3	black

MATERIAL

glazed porcelain


VARIATION

V1


TILE EDGE

rectified

Please Note: white achieves a P1 slip rating

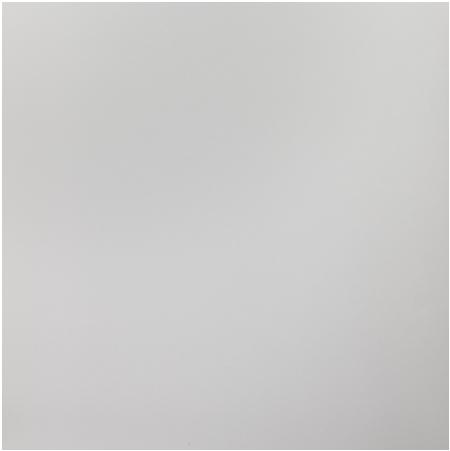

white

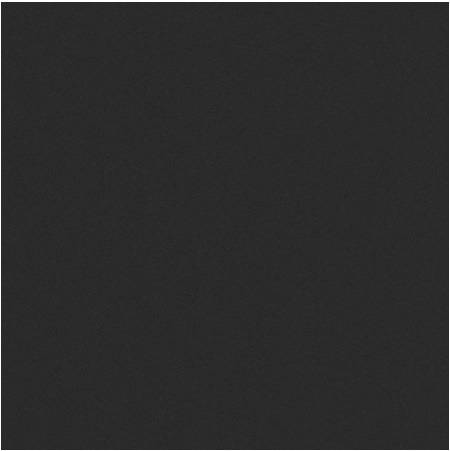

black

Colours shown in images may differ due to variations in photographic conditions and screen displays. Samples provided may not accurately reflect the exact shade or batch supplied, as variation is an inherent property of tiles and stone. Listed sizes and thicknesses are nominal and may vary slightly from actual working dimensions.

technical data

properties	test method	prescribed value	value
WATER ABSORPTION	ISO 10545-3	≤0.5%	≤0.1%
BENDING STRENGTH	ISO 10545-4	≥12 MPa	≥33.5 MPa
BREAKING STRENGTH	ISO 10545-4	≥350 N	780 N
ABRASION RESISTANCE	ISO 10545-7	Max. 175 mm ³ PEI 1-5	Class 3
RESISTANCE TO CHEMICALS	ISO 10545-13	Household chemicals & swimming pool salts	GA
		Low concentration of acids & alkalis	GLA
RESISTANCE TO STAINING	ISO 10545-14	Minimum class 3	Class 5

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

