

skheme®


kan




kan




white

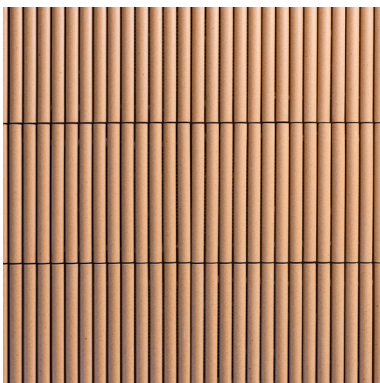


mustard

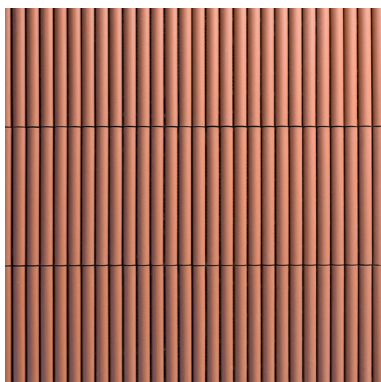


cotto

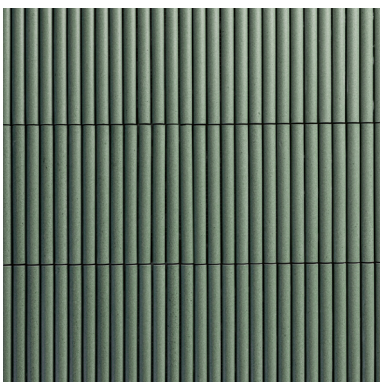


green

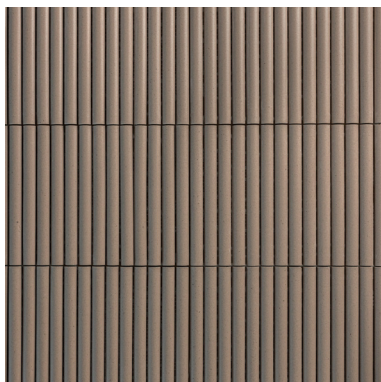

pumice

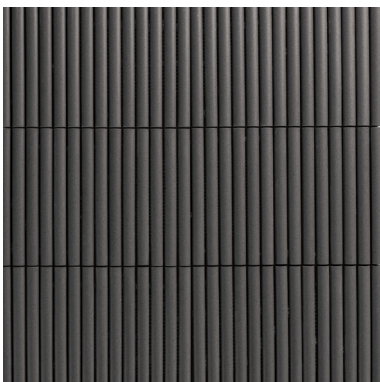

basalt



mosaic

20x215mm



3D format



mosaic



wall only



V2

PRODUCT SPECIFICATIONS

format	size	finish	thickness	slip rating	colour
mosaic	20x215mm	matt	12mm	N/A	all colours

MATERIAL

unglazed porcelain

VARIATION

V2

TILE EDGE

rectified

* 20x215mm mosaics are available in a sheet size of 215x300mm


Colours shown in images may differ due to variations in photographic conditions and screen displays. Samples provided may not accurately reflect the exact shade or batch supplied, as variation is an inherent property of tiles and stone. Listed sizes and thicknesses are nominal and may vary slightly from actual working dimensions.

left pictured: white
right pictured: mustard





left pictured: basalt
right pictured: green

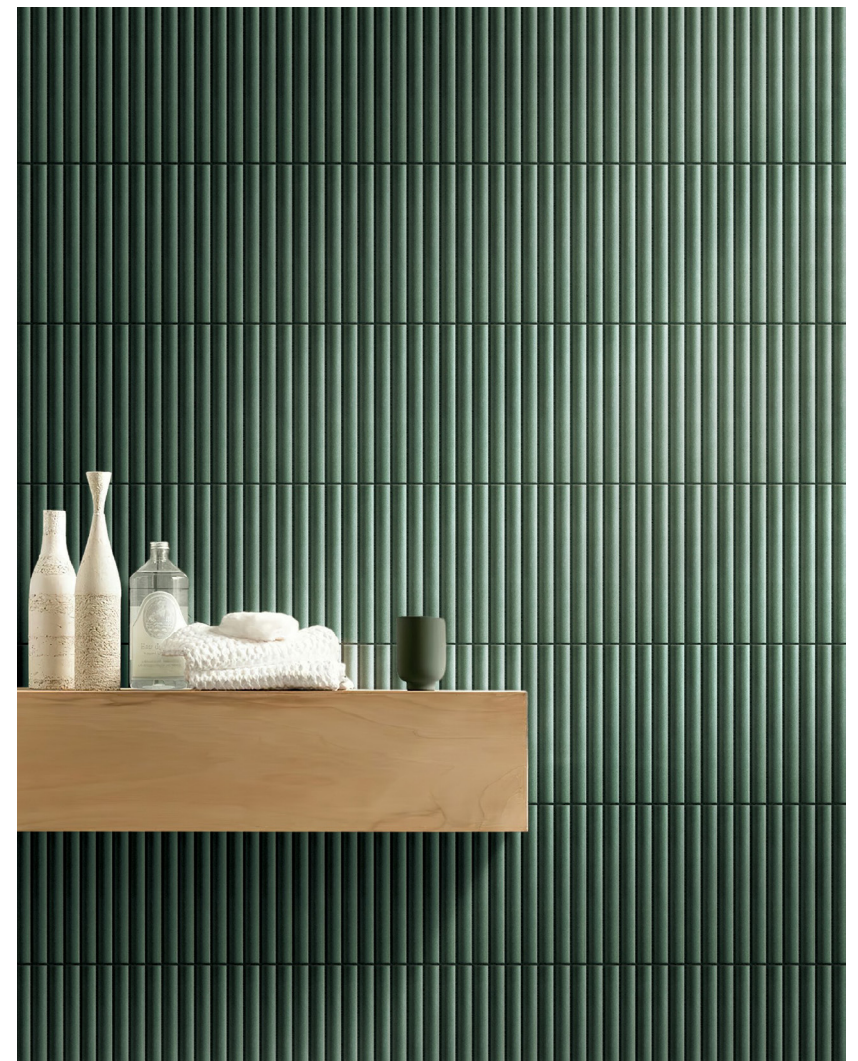



technical data

properties	test method	prescribed values	result
WATER ABSORPTION	ISO 10545-3	<0.5%	0.26%
MODULUS OF RUPTURE	ISO 10545-4	Minimum 35	51.1
SURFACE QUALITY	ISO 10545-2	Complies	100%
BREAKING STRENGTH	ISO 10545-4	≥1300 N	4361
RESISTANCE TO STAINING	ISO 10545-14	Declared value	Class 5
RESISTANCE TO CHEMICALS	ISO 10545-13	Minimum class B	A
SCRATCH HARDNESS	EN 15771	-	≥6

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.