

# Hampton



HAMPTON comes in two shades; a pale grey and charcoal. HAMPTON has soft tones and a slightly textured finish.

**PRODUCT TYPE:** Glazed porcelain

**COLOURS:** Serena and Basalt

**SIZES:** 150x300mm, 300x300mm, 300x600mm  
and 600x600mm  
Rectified edges


**FINISHES/USAGE:** Matt and Grip/Wall and Floor

**AESTHETIC QUALITIES:** Soft shades of grey, slightly textured

**TECHNICAL DATA:** Matt P3 Pendulum  
Grip P5 Pendulum

The GRIP finish in all colours receives a Sustainable Slip Resistance value of P3 'X' pendulum after 500 cycles

**VARIATION:**







V2

# Hampton


SIZES	FINISHES	SLIP RATING	TILE EDGE
150x300mm	MATT	P3 Pendulum	RECTIFIED
300x300mm	MATT	P3 Pendulum	RECTIFIED
300x600mm	MATT	P3 Pendulum	RECTIFIED
600x600mm	MATT	P3 Pendulum	RECTIFIED
150x300mm	GRIP	P5 Pendulum	RECTIFIED
600x600mm	GRIP	P5 Pendulum	RECTIFIED

\*The GRIP finish in all colours receives a Sustainable Slip Resistance value of P3 'X'pendulum after 500 cycles

## FORMATS

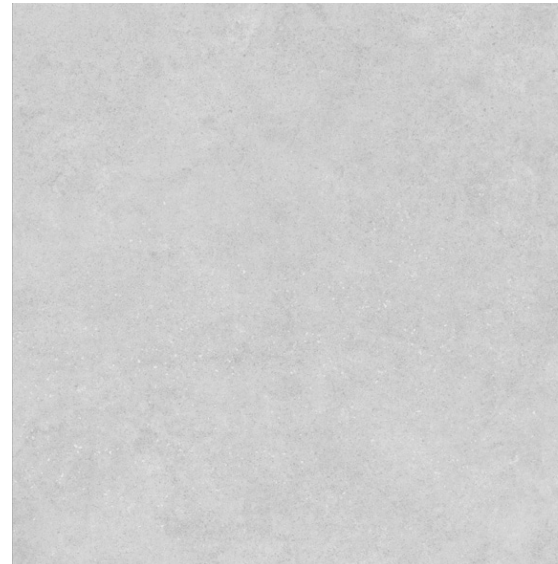

SERENA

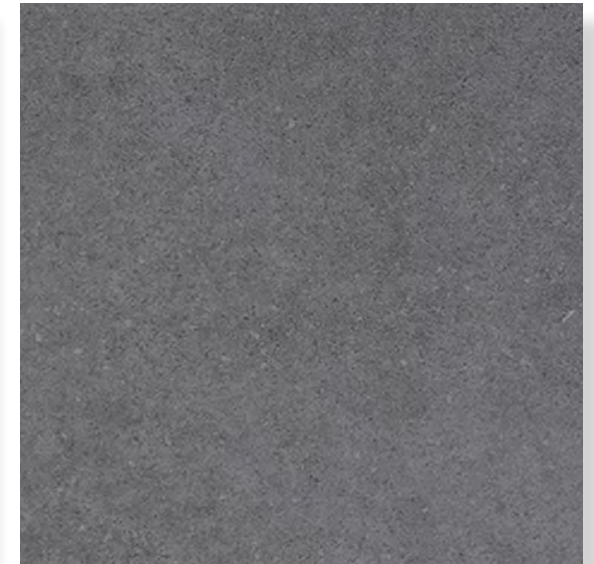

BASALT


# Hampton







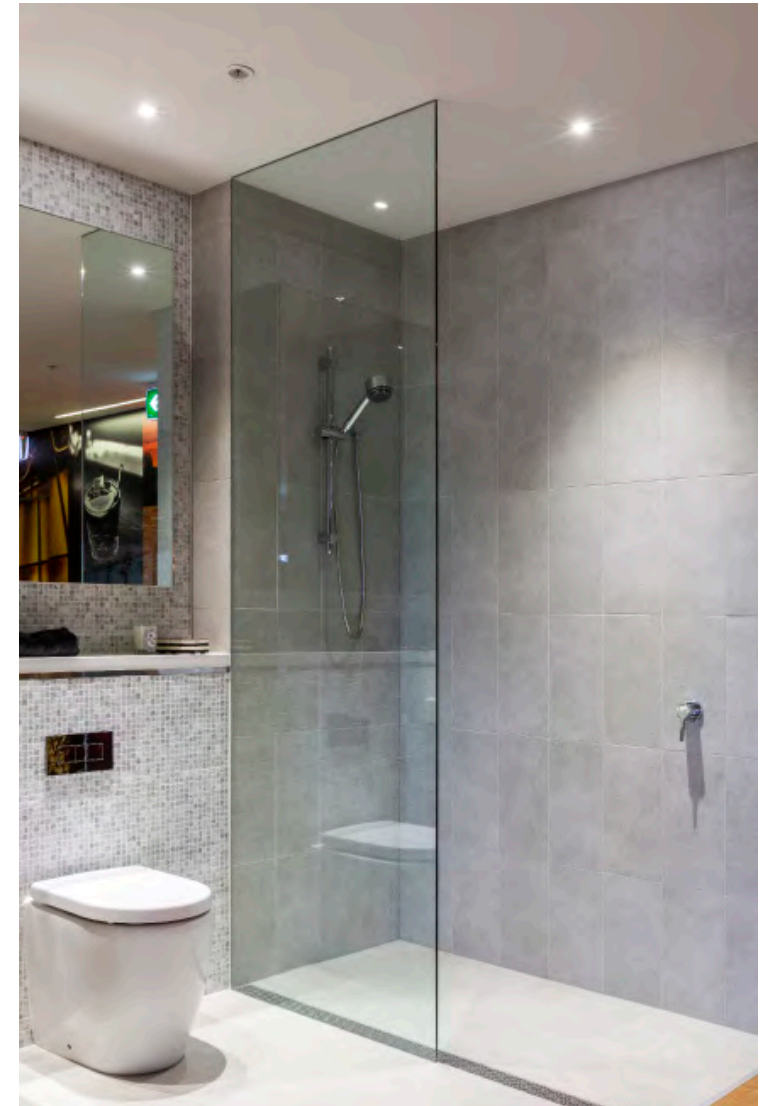

# Hampton



Photographer: Tom Ferguson



# Hampton

	technical characteristics	test method	required values	value
	water absorption	iso 10545-3	≤ 0,5%	≤ 1%
	bending strength	iso 10545-4	≥ 12MPA	≥ 33.5MPA
	breaking strength (S)	iso 10545-4	≥ 350 N	≥ 1300 N
	abrasion resistace	iso 10545-7	Max. 175 mm <sup>3</sup> Para Pulldos PEI 1-5 para esmaltados	class 3
	chemical resistance	iso 10545-14	GB Para Esmaltados UB para Puidos	≥ UA
	stain resistance	iso 10545-14		≥ Grado 3