skheme®

Nordic



PRODUCT TYPE:	Glazed Porcelain Floor Tile	
COLOURS:	Ivory and Silver	
SIZES:	150x300mm, 300x300mm, 300x600mm and 600x600mm Rectified Edges	
FINISHES/USAGE:	Matt/Grip, Wall and Floor	
AESTHETIC QUALITIES:	Mediterranean grey marble	
TECHNICAL DATA:	`P3' X Pendulum Slip Rating (Matt) `P5' V Pendulum Slip Rating (Grip) More technical info on the last page	
VARIATION:		

The mediterranean marble look without the associated maintenance. These porcelain tiles are suitable for all environments in matt and grip finishes.

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint. Visit <u>http://www.skheme.com/Conditions.aspx</u> for all disclaimer, copyright and terms and conditions.

V2

skheme®

Nordic

PRODUCT SPECIFICATIONS


SIZES	FINISHES	SLIP RATING	TILE EDGE
150x300mm*	MATT	P3 `X' PENDULUM	RECTIFIED
300x300mm	MATT	P3 `X' PENDULUM	RECTIFIED
300x600mm	MATT	P3 `X' PENDULUM	RECTIFIED
600X600mm	MATT	P3 `X' PENDULUM	RECTIFIED
300x600mm	GRIP	P5 'V' PENDULUM	RECTIFIED

* Indent item - Subject to stock availability overseas, please allow 10-12 weeks lead time from date of order confirmation. Minimum quantity may apply.



Nordic Ivory Matt


Nordic Ivory Grip

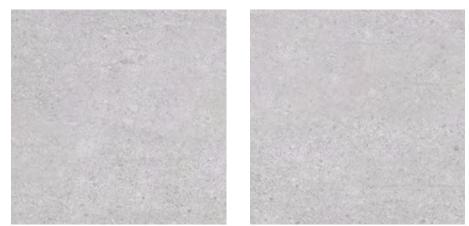

Nordic Silver Matt

Nordic Silver Grip

FORMATS



skheme®

Nordic

	technical characteristics Group B I a	test method	required values	value
۵ ۵ ۵ ۵ ۵	water absorption	iso 10545-3	≤ 0.5 %	0.21%
ŝĉ	bending strength	iso 10545-4	≥12MPA	≥33.5MPA
Ĝĉ	breaking strength (S)	iso 10545-4	≥ 350 N	≥ 1785N
Ö	abrasion resistace	iso 10545-7	Max. 175 mm³ PEI 1-5	Class 3
	chemical resistance	iso 10545-13	Household chemicals and swimming pool salts	GA
·			Low concentration of acids and alkalis	GLA
2	stain resistance	iso 10545-14	Minimum Class 3	Class 5



Nordic

