

Tivoli



PRODUCT TYPE: Glazed Porcelain

COLOURS: White and Taupe

TILE SIZES: 75x75mm mosaic, 300x600mm and
600x1200mm
Rectified edges


TILE FINISHES/USAGE: Matt and Grip/Wall and Floor

AESTHETIC QUALITIES: Travertino look, mosaic and tile formats

TILE TECHNICAL DATA: P3 Pendulum slip rating (Matt)
P4 Pendulum slip rating (Grip)
More technical data on the last page

ORIGIN: Italy

VARIATION:



V2


Made in Italy, TIVOLI realistically represents travertine, an ancient and natural stone. Beautifully textured with all the irregularities and variations in colour, TIVOLI is available in two colours and both tile and mosaic format.

Tivoli

PRODUCT SPECIFICATIONS - TILES

SIZES	FINISHES	SLIP RATING	TILE EDGE
75x75mm	MATT MOSAIC	P3 Pendulum	RECTIFIED
300x600mm	MATT	P3 Pendulum	RECTIFIED
600x1200mm	MATT	P3 Pendulum	RECTIFIED
600x1200mm	GRIP	P4 Pendulum	RECTIFIED

FORMATS




300x300mm sheet



WHITE MATT



WHITE GRIP

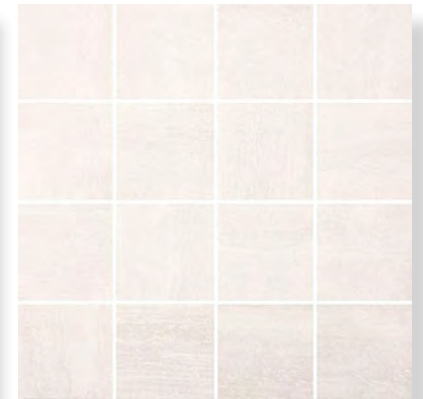


WHITE MATT MOSAIC

Tivoli

PRODUCT SPECIFICATIONS - TILES

SIZES	FINISHES	SLIP RATING	TILE EDGE
75x75mm	MATT MOSAIC	P3 Pendulum	RECTIFIED
300x600mm	MATT	P3 Pendulum	RECTIFIED
600x1200mm	MATT	P3 Pendulum	RECTIFIED
600x1200mm	GRIP	P4 Pendulum	RECTIFIED

FORMATS



300x300mm sheet



TAUPE MATT



TAUPE GRIP



TAUPE MATT MOSAIC









Tivoli



Tivoli



TECHNICAL DATA

	technical characteristics	test method	required values	result
	water absorbtion	EN ISO 10545-3	$E_b \leq 0,5\%$	compliant
	modulus of rupture	EN ISO 10545-4	Medium value 35 N/mm ² min	compliant
	thermal shock resistance	EN ISO 10545-9	*Pass according to ISO 10545-1	resistant
	breaking strength	EN ISO 10545-4	sp. $\geq 7,5$ mm: min 1300 N	compliant
	abrasion resistance	EN ISO 10545-6	175 mm ³ max	average < 150 mm ³
	chemical resistance	EN ISO 10545-13	Declared value	ULA UHB UA
	resistance to frost	EN ISO 10545-12	*Pass according to ISO 10545-1	resistant
	staining resistance	EN ISO 10545-14	*Declared value	Class 5